

Liquid Line WX | System 40 mm Wall



DE LED-Wandanbauleuchte. Direkt-indirektstrahlend. Leuchtenkörper mit feinen Radien aus Aluminium, gefertigt aus einem Guss ohne sichtbare Nahtstellen an den Stirnseiten. Oberfläche weiß, silber, graphit, schwarz oder champagnerfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Satinierter Opaldiffusor für Allgemeinbeleuchtung mit max. Transmissionsgrad und homogener Lichtpunktauflösung. Konverter in Leuchtengehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI). Farbtemperatur 2200K, 2700, 3000K, 4000K, 6500K oder Tunable White. Binning initial $\leq$ MacAdam 3. Farbwiedergabe CRI $>$ 80. Auf Anfrage: Integration von Notlichtkomponenten.

EN LED wall mounted luminaire. Direct-indirect light distribution. Luminaire body with smooth curves made of aluminium, crafted in one piece with no visible seams at the ends. Surface white, silver, graphite, black or champagne coated. Further surface options see Lightnet-Surface-Collection or RAL of your choice. Satin opal diffuser for general lighting with maximum transmittance and homogeneous lighting. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI). Colour temperature 2200K, 2700, 3000K, 4000K, 6500K or Tunable White. Binning $\leq$ MacAdam 3. Colour rendering CRI $>$ 80. On request: Integration of emergency lighting components.

Product Family

Type

Optical System

Surface Finish

Control Gear

Colour Rendering

Colour Temperature

Power

Size

On Request

Q: Liquid Line

WX: Direct-Indirect

O: Opal Diffuser

W: Snow White, **V**: Ivory White, **S**: Radiant Silver, **U**: Urban Graphite, **B**: Jet Black, **H**: Anodic Champagne, **K**: Satin Copper

E: On/Off, **L**: DALI, **H**: Touch-Dim, **C**: Casambi, **6**: DALI DT6 for TW [L1182-L2055], **8**: DALI DT8 for TW [L890-L2055]

8: CRI>80, **9**: CRI>90, **F**: Full Spectrum [except 2200K]

22: 2200K, **27**: 2700K, **30**: 3000K, **35**: 3500K, **40**: 4000K, **65**: 6500K, **TW**: Tunable White 2700-6500K

M: Medium Power, **H**: High Power

Luminaire Length in mm: **L600, L890, L1182, L1475, L1765, L2055**

Emergency Module [L1182-L2055]

IP20

-220-240V

50-60 Hz

IK 02

RG0


≤3 MacAurum

MEDIUM POWER L85B10 90000K

HIGH POWER L80B10 90000K


CE

UK CA



L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
600	1960lm/17W	2590lm/23W
890	3060lm/25W	4020lm/33W
1182	4140lm/32W	5440lm/42W
1475	5240lm/40W	6870lm/53W
1765	6320lm/48W	8300lm/64W
2055	7410lm/58W	9730lm/77W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

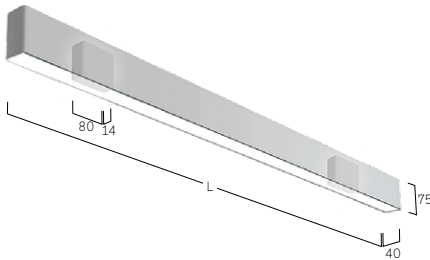

W Snow White



S Radiant Silver



U Urban Graphite



B Jet Black



H Anodic Champagne



K Satin Copper