


RINGO STAR G1/P1 | SYSTEM 100MM SUSPENDED

-PARALLEL SUSPENSION | D2500-D8000


1. MONTAGE UND INSTALLATION | MOUNTING AND INSTALLATION:

The luminaire must be installed in the order indicated on the labels, starting with parts A, B, C...

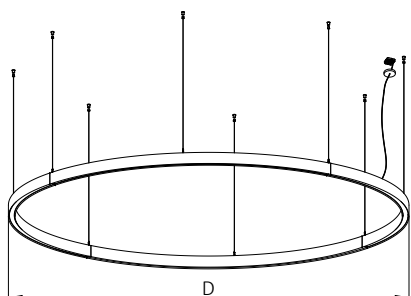

IMPORTANT:

- All sections must be suspended individually and perfectly levelled (horizontally and vertically) before connecting them together - this is crucial
- All suspension cords must be positioned perfectly vertical
- All suspension cords must be tensioned with the same strength
- If these conditions are not satisfied then the different parts will settle to different levels and work against one another.

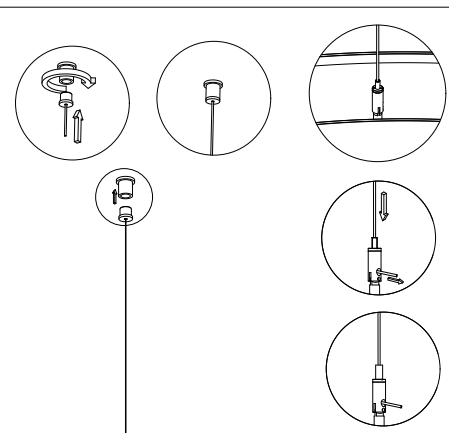


1. Bei allen Montagearbeiten Handschuhe tragen.
Use gloves when handling the fixture.




2.

3.

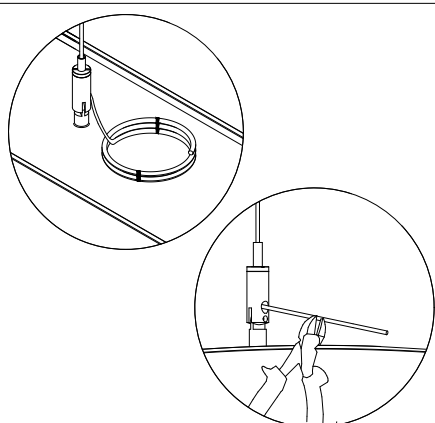


4. IMPORTANT!


After levelling the luminaire at the desired height, cut off the excess of the suspension cord or roll it up and secure it to avoid a short-circuit caused by contact with the light sources.

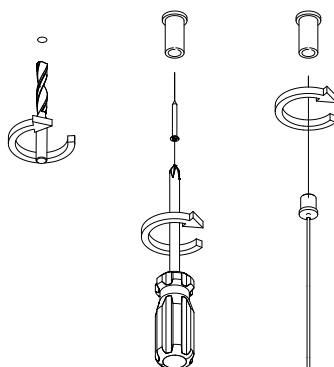


5.

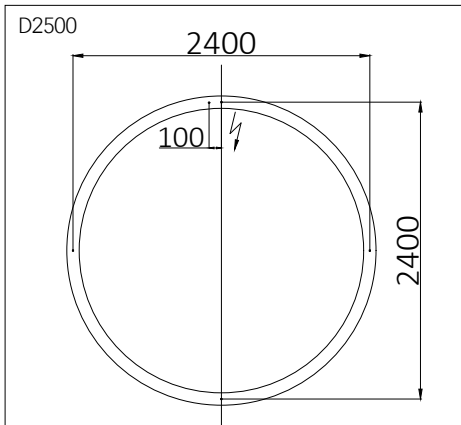

6.

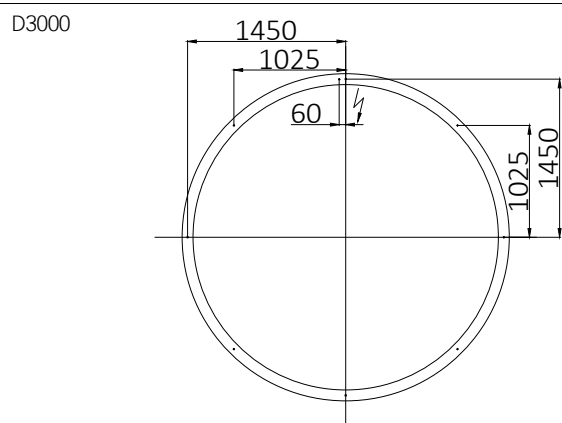

7.






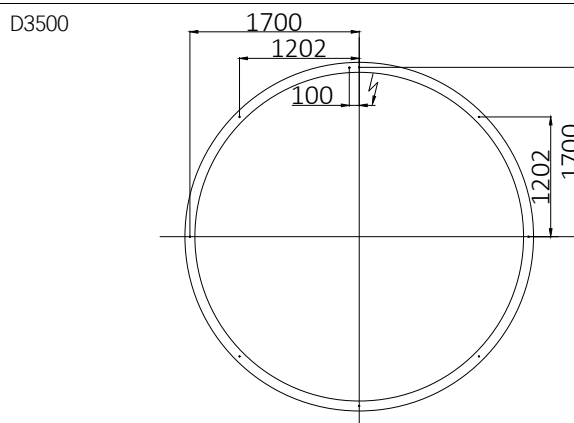


8.

RINGO STAR G1/P1 | SYSTEM 100MM SUSPENDED

-PARALLEL SUSPENSION | D2500-D8000

1. MONTAGE UND INSTALLATION | MOUNTING AND INSTALLATION:

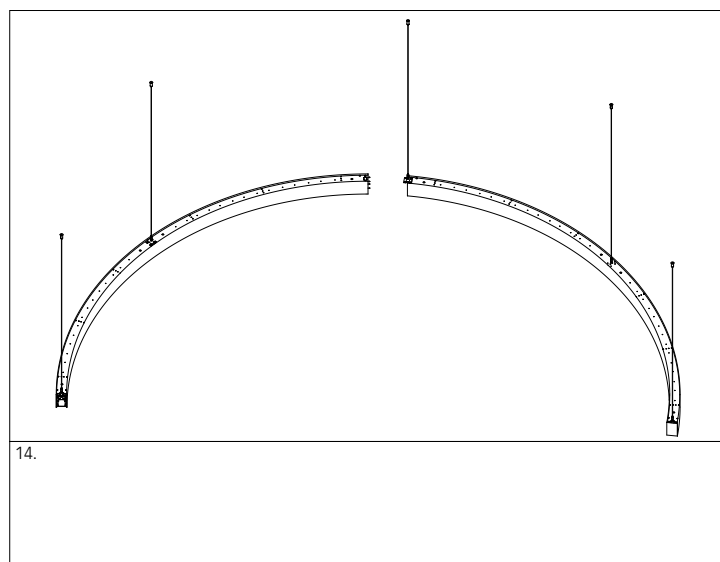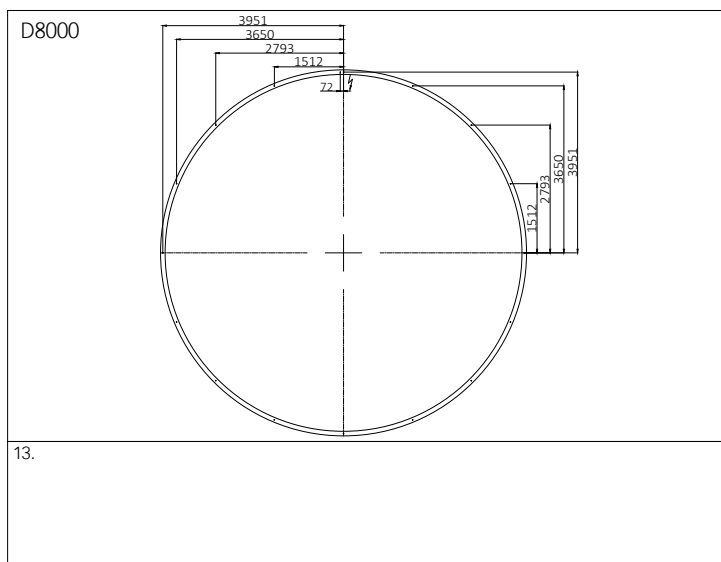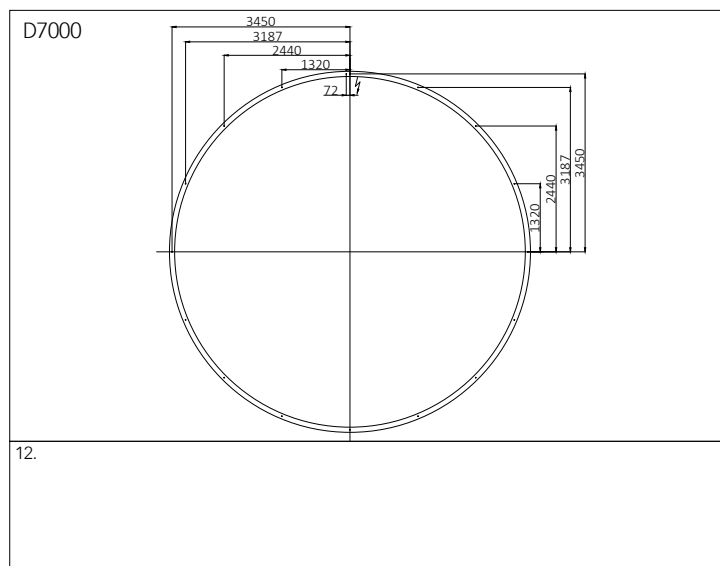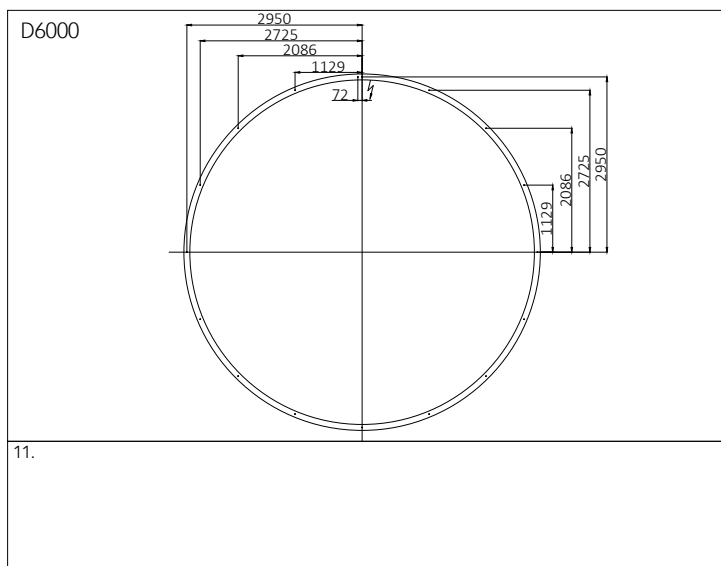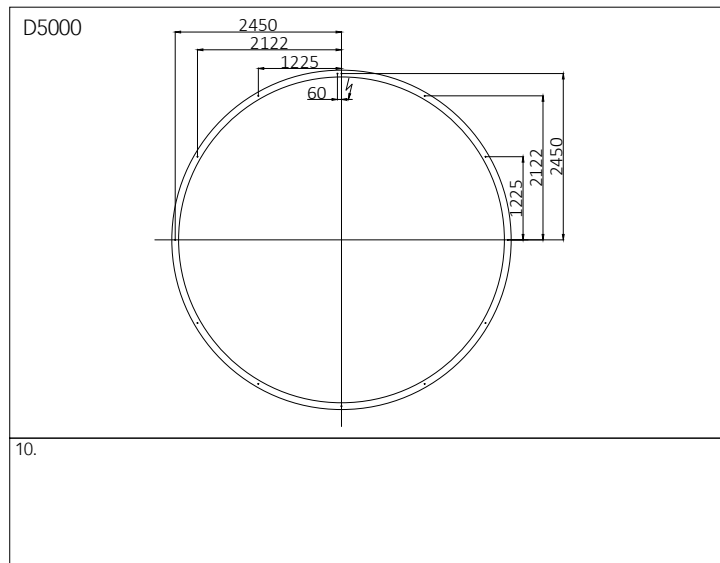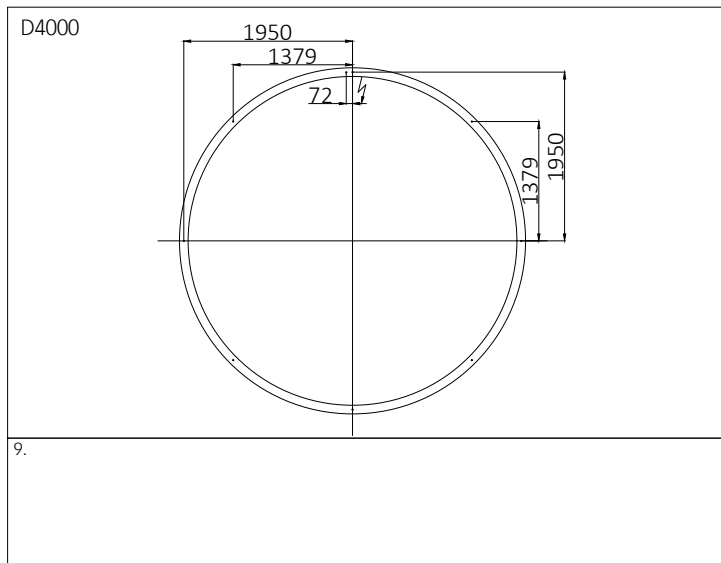


RINGO STAR G1/P1 | SYSTEM 100MM SUSPENDED


-PARALLEL SUSPENSION | D2500-D8000

1. MONTAGE UND INSTALLATION | MOUNTING AND INSTALLATION:


Allen Key is included

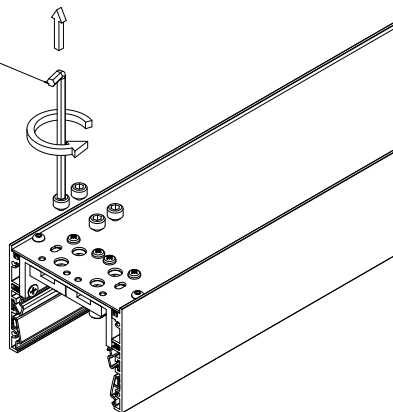


15.

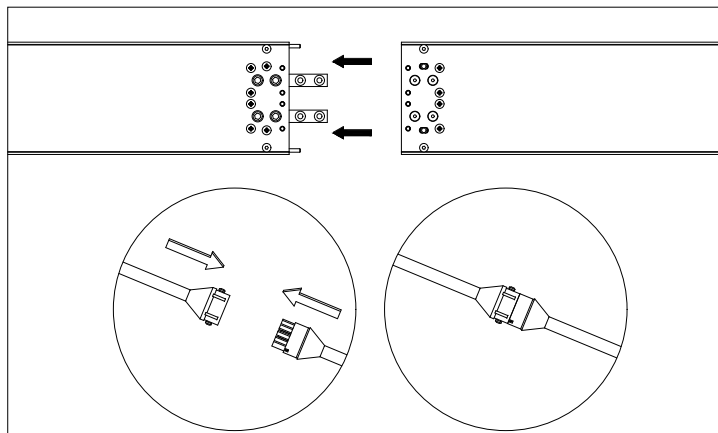


16. All LED gear trays are numbered and the numbering starts from the cable entry side.
In non-standard luminaires the numbering of LED gear trays is made in accordance with technical drawings.

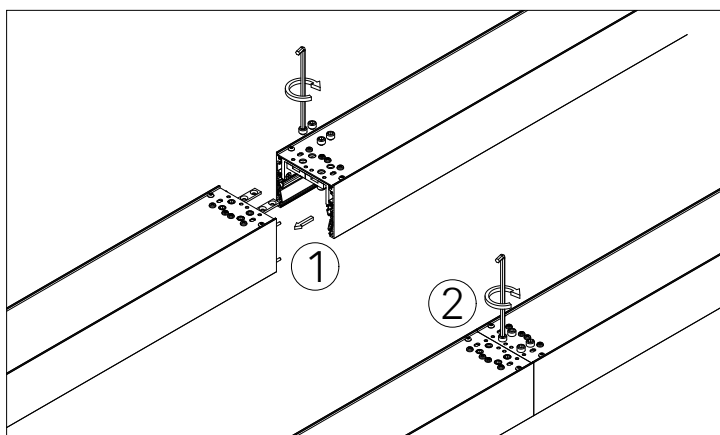

17.

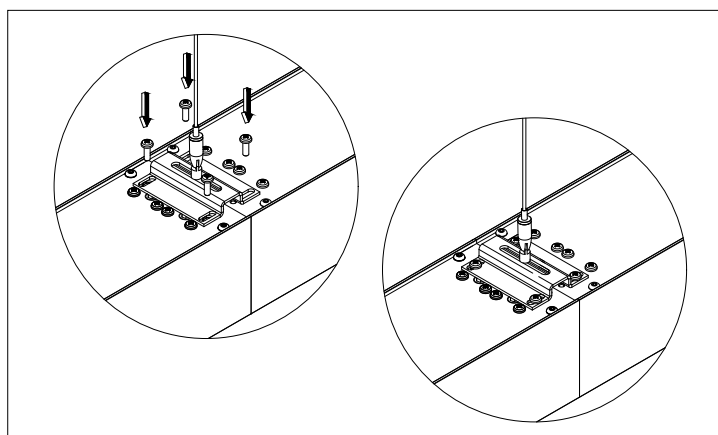


18.

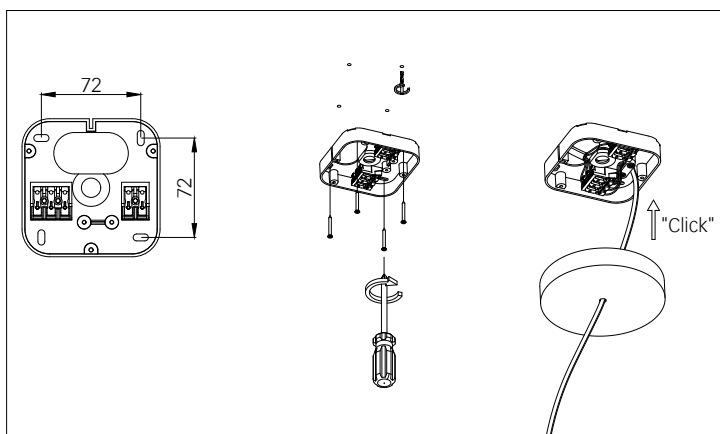

19.

- min/max stripped wire length: 7mm-10mm

- max power supply cable: 1,5mm²

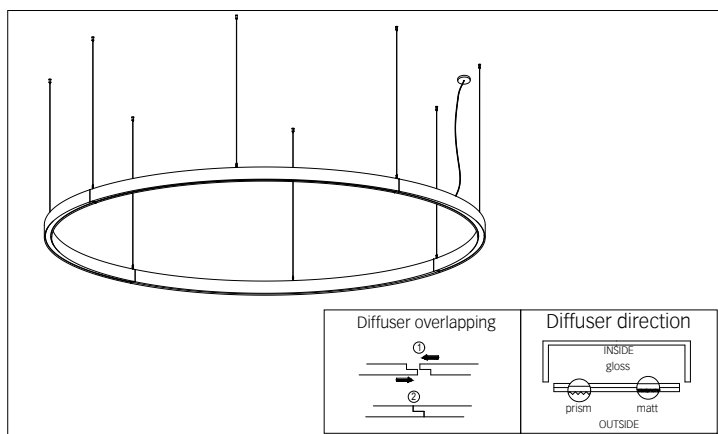

20.