

Cubic Max G2/P2 | Suspended



DE LED-Pendelleuchte. Direkt-indirekt oder rein direktstrahlend. Leuchtenkörper mit Bauhöhe 75mm aus Aluminiumprofil. Oberfläche natureloxiert oder weiß, graphit, schwarz bzw. champagnerfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Microprismenoptik mit optimierter Blendungsbegrenzung speziell für Office-Anwendungen. Satinierter Opaldiffusor (Q330-Q1200) und opale Folie (Q1500, Q2000) für Allgemeinbeleuchtung mit max. Transmissionsgrad und homogener Lichtpunktauflösung. Konverter in Leuchtengehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI, Touch-Dim, Casambi). Farbtemperatur 2200K, 2700K, 3000K, 3500K, 4000K, 6500K oder Tunable White (2700-6500K). Binning initial $\leq$ MacAdam 3. Farbwiedergabe CRI>80, CRI>90 oder Full Spectrum. Stufenlos höhenverstellbare Seilabhngung mit transparent ummantelter Zuleitung. Lackierung Baldachin passend Leuchtenkrper. Auf Anfrage: Integration von Notlichtkomponenten, Sensortechnologie.

EN LED pendant luminaire. Direct-indirect or direct-only light distribution. Luminaire body made of 75mm high aluminium profile. Surface natural anodised or white, graphite, black or champagne coated. Further surface options see Lightnet-Surface-Collection or RAL of your choice. Micro-prismatic screen with optimized glare reduction especially for workplaces. Satin opal diffuser (Q330-Q1200) and opal foil (Q1500, Q2000) for general lighting with maximum transmittance and homogeneous lighting. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI, Touch-Dim, Casambi). Colour temperature 2200K, 2700K, 3000K, 3500K, 4000K, 6500K or Tunable White (2700-6500K). Binning $\leq$ MacAdam 3. Colour rendering CRI>80, CRI>90 or Full Spectrum. Height-adjustable cord suspension with transparent power supply cable. Colours ceiling rose match to luminaire body. On request: Integration of emergency lighting components, sensor technology.


C P2 A B E-8 30 M-Q630-K

Product Family	C: Cubic
Type	G2: Direct only, P2: Direct-Indirect
Optical System	A: Microprismatic [Q330-Q1200], O: Opal Diffuser [Q330-Q1200], T: Opal Stretch Foil [Q1500, Q2000]
Surface Finish	W: Snow White, E: Silver Anodised [Q330-Q1200], S: Radiant Silver, U: Urban Graphite, B: Jet Black, H: Anodic Champagne
Control Gear	E: On/Off, L: DALI, H: Touch-Dim, C: Casambi, 6: DALI DT6 for TW, 8: DALI DT8 for TW
Colour Rendering	8: CRI>80, 9: CRI>90, F: Full Spectrum [except 2200K]
Colour Temperature	22: 2200K, 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K, TW: Tunable White 2700-6500K [Q330-Q1200]
Power	M: Medium Power, H: High Power
Size	Square size in mm: Q330, Q430, Q530, Q630, Q900, Q1200, Q1500, Q2000
Suspension	K: Parallel Suspension
On Request	Emergency Module [Q430-Q1200], Multisensor



Microprismatic Direct-Indirect			Microprismatic Direct			Opal Diffuser / Opal Stretch Foil Direct-Indirect			Opal Diffuser/ Opal Stretch Foil Direct		
Q mm	Lumen/Watt Medium Power	Lumen/Watt High Power	Q mm	Lumen/Watt Medium Power	Lumen/Watt High Power	Q mm	Lumen/Watt Medium Power	Lumen/Watt High Power	Q mm	Lumen/Watt Medium Power	Lumen/Watt High Power
330	2470lm/18W	3640lm/27W	330	1360lm/12W	2010lm/18W	330	2510lm/18W	3700lm/27W	330	1400lm/12W	2070lm/18W
430	4360lm/30W	6300lm/44W	430	2370lm/19W	3450lm/27W	430	4430lm/30W	6400lm/44W	430	2440lm/19W	3550lm/27W
530	6000lm/42W	11170lm/78W	530	3630lm/27W	6790lm/50W	530	6110lm/42W	11370lm/78W	530	3740lm/27W	6990lm/50W
630	9610lm/68W	14270lm/103W	630	5200lm/40W	8500lm/65W	630	9770lm/68W	14530lm/103W	630	5360lm/40W	8760lm/65W
900	11660lm/89W	18570lm/161W	900	7910lm/67W	13240lm/129W	900	11900lm/89W	18970lm/161W	900	8150lm/67W	13640lm/129W
1200	19310lm/152W	30990lm/273W	1200	14100lm/122W	23550lm/228W	1200	19730lm/152W	31700lm/273W	1200	14520lm/122W	24260lm/228W
						1500	30200lm/233W	47570lm/414W	1500	21170lm/189W	34990lm/356W
						2000	41580lm/318W	65800lm/578W	2000	30490lm/268W	50380lm/510W


Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

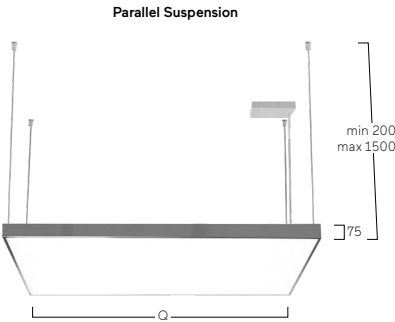

W Snow White




E Silver Anodised



U Urban Graphite



B Jet Black



H Anodic Champagne