

Cubic-G2

Pendant luminaire - Direct light distribution

Article code: CG2AWL-840M-Q900-K



Illustrations may only be similar and serve as an orientation.





Cubic-G2. LED. Pendant luminaire with minimalist edge of only 5mm. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Dimmable DALI. LxWxH (square). L= 900mm. W=900mm. H=75mm. Cord suspension for parallel installation with power supply cable and ceiling rose (Set). Pendant length max 1500mm. Power supply:

transparent. Ceiling rose: Matching luminaire`s surface colour. Medium-power current. 7910lm. 67W. 16,2kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Cubic-G2

Pendant luminaire - Direct light distribution

Article code: CG2AWL-840M-Q900-K

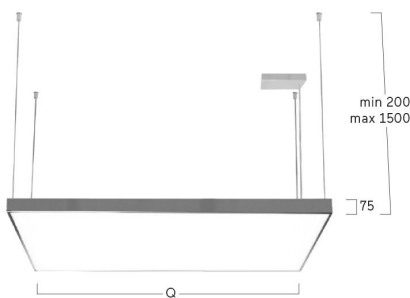

Customer / Project: _____

Note: _____

| | |
|------------------------------|---|
| Productname | Cubic-G2 |
| Lamp | LED |
| Installation Type | Pendant luminaire |
| Surface finish | Snow White |
| Light characteristics | Direct light distribution |
| Colour temperature | 4000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Microprismatic screen |
| Control | Dimmable (DALI) |
| Length L/Diameter D (mm) | L=900mm |
| Width W (mm) | W=900mm |
| Height H (mm) | H=75mm |
| Current/Power | Medium-Power |
| Luminous Flux | 7910lm |
| Power consumption | 67W |
| Suspension | Parallel susp. (Set) |
| Ceiling rose colour | Ceiling rose: Matching luminaire`s surface colour |
| Pendant length (mm) | Pendant length max 1500mm |
| Degree of protection | IP20 |
| Certification | Prüfzeichen: ENEC |
| Cable Colour | Power supply: transparent |
| LED lifetime | L85B10 (tq 25°C) = 50.000h |
| UGR | UGR<=19 |
| Photometric code | 8 40 / 3 3 9 |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 16,2kg |

