


Cubic-W4

Wall mounted luminaire - Direct/indirect light distribution

Article code: CW4ABE-840M-L600

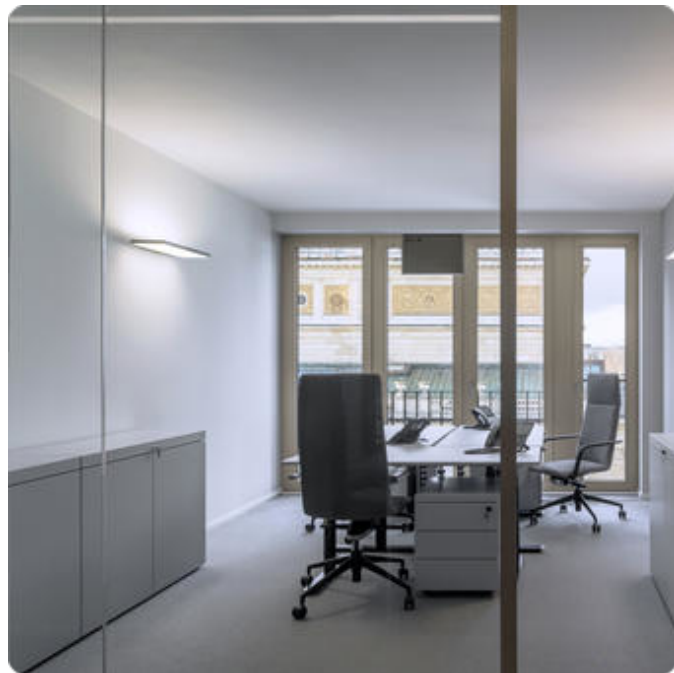

Illustrations may only be similar and serve as an orientation.



Cubic-W4. LED. Wall mounted luminaire. Luminaire body with 25mm visible overall height and minimalist edge of only 5mm. Luminaire body made of high-quality aluminum profile. Surface finish Jet Black. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<13. Switchable. LxWxH (rectangular). L= 600mm. W=200mm. H=

35mm. Medium-power current. 6550lm. 47W. 3,3kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Cubic-W4

Wall mounted luminaire - Direct/indirect light distribution

Article code: CW4ABE-840M-L600

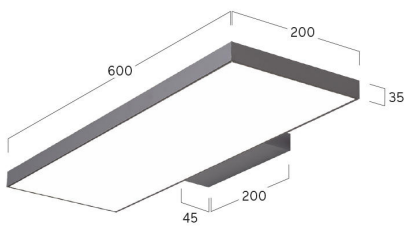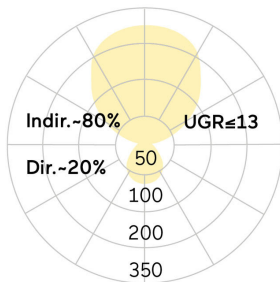

Customer / Project: _____

Note: _____

| | |
|------------------------------|------------------------------------|
| Productname | Cubic-W4 |
| Lamp | LED |
| Installation Type | Wall mounted luminaire |
| Surface finish | Jet Black |
| Light characteristics | Direct/indirect light distribution |
| Colour temperature | 4000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Microprismatic screen |
| Control | Switchable |
| Length L/Diameter D (mm) | L=600mm |
| Width W (mm) | W=200mm |
| Height H (mm) | H=35mm |
| Current/Power | Medium-Power |
| Luminous Flux | 6550lm |
| Power consumption | 47W |
| Degree of protection | IP20 |
| Certification | Prüfzeichen: ENEC |
| LED lifetime | L85B10 (tq 25°C) = 50.000h |
| UGR | UGR<13 |
| Photometric code | 8 40 / 3 3 9 |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 3,3kg |

