


## Cubic-W4

Wall mounted luminaire - Direct/indirect light distribution

Article code: CW4ABL-830M-L600

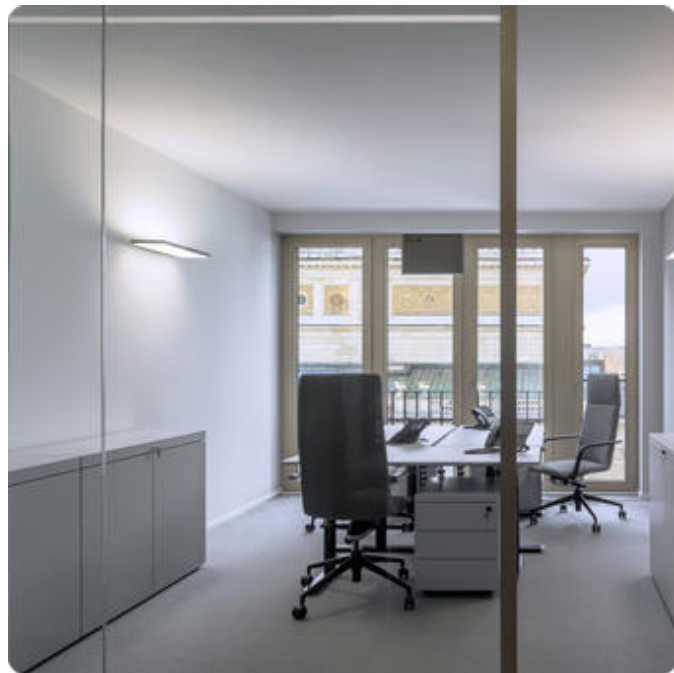

Illustrations may only be similar and serve as an orientation.



Cubic-W4. LED. Wall mounted luminaire. Luminaire body with 25mm visible overall height and minimalist edge of only 5mm. Luminaire body made of high-quality aluminum profile. Surface finish Jet Black. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<13. Dimmable DALI. LxWxH (rectangular). L= 600mm. W=200mm.

H=35mm. Medium-power current. 6124lm. 47W. 3,3kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

## Cubic-W4

Wall mounted luminaire - Direct/indirect light distribution

Article code: CW4ABL-830M-L600

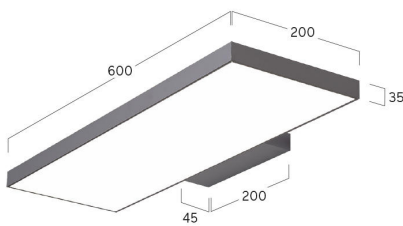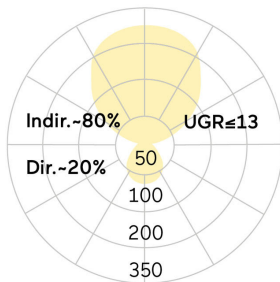

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Cubic-W4
Lamp	LED
Installation Type	Wall mounted luminaire
Surface finish	Jet Black
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Dimmable (DALI)
Length L/Diameter D (mm)	L=600mm
Width W (mm)	W=200mm
Height H (mm)	H=35mm
Current/Power	Medium-Power
Luminous Flux	6124lm
Power consumption	47W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<13
Photometric code	8 30 / 3 3 9
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	3,3kg

