

Cubic-M7

Recessed mounted luminaire, mounting brackets incl -
Direct only omnidirectional light distribution

Article code: CM7FWL-840M-Q379



Illustrations may only be similar and serve as an orientation.

Cubic-M7. LED. Recessed mounted luminaire with surrounding frame for installation in sawn wall and ceiling with cut-out openings. Mounting brackets included. Luminaire body with increased stability for installation. Surface finish Snow White. Direct only omnidirectional light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Ambient diffuser made of frosted methacrylate for enhanced light transmission and perfect uniform illumination. Dimmable DALI. LxWxH

(square). L=379mm. W=379mm. H=100+40mm. Medium-power current. 1310lm. 12W. 4,6kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Cubic-M7


Recessed mounted luminaire, mounting brackets
incl - Direct only omnidirectional light

Article code: CM7FWL-840M-Q379



Customer / Project: _____

Note: _____

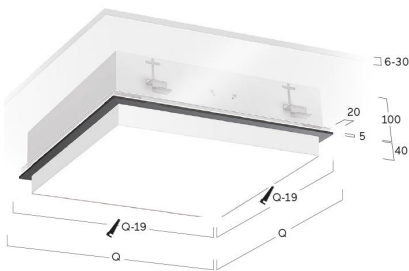

Productname	Cubic-M7
Lamp	LED
Installation Type	Recessed mounted luminaire, mounting brackets incl
Surface finish	Snow White
Light characteristics	Direct only omnidirectional light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Ambient diffuser
Control	Dimmable (DALI)
Length L/Diameter D (mm)	L=379mm
Width W (mm)	W=379mm
Height H (mm)	H=100+40mm
Current/Power	Medium-Power
Luminous Flux	1310lm
Power consumption	12W
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	4,6kg

