

Midpoint-W7

Spotlight for wall surface mounting - Direct/indirect light distribution

Article code: PW7ABE-930AM-BK




Illustrations may only be similar and serve as an orientation.

Midpoint-W7. LED. Spotlight for wall surface mounting. Luminaire body made of high-quality aluminum profile. Surface finish Jet Black. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >90. Reflector with beam angle SPOT 10°. Reflector: Jet Black. XICATO/ARTIST (CRI>97). Clear Cover. Switchable. DxHxW (spots). D=90mm. W=105mm. H=

320mm. Medium-power current. 2180lm. 38W. 1,7kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG1 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Midpoint-W7

Spotlight for wall surface mounting -
Direct/indirect light distribution

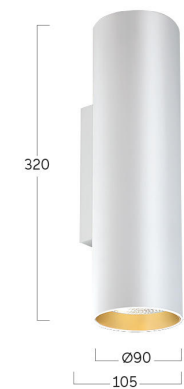

Article code: PW7ABE-930AM-BK

Customer / Project: _____

Note: _____

| | |
|------------------------------|-------------------------------------|
| Productname | Midpoint-W7 |
| Lamp | LED |
| Installation Type | Spotlight for wall surface mounting |
| Surface finish | Jet Black |
| Light characteristics | Direct/indirect light distribution |
| Colour temperature | 3000K |
| Colour Rendering Index (CRI) | CRI>90 |
| Reflector Beam Angle | Reflector: SPOT 10° |
| Reflector Colour Inside | Reflector: Jet Black |
| LED-Module Type | XICATO/ARTIST (CRI>97) |
| Cover | Clear Cover |
| Control | Switchable |
| Length L/Diameter D (mm) | D=90mm |
| Width W (mm) | W=105mm |
| Height H (mm) | H=320mm |
| Current/Power | Medium-Power |
| Luminous Flux | 2180lm |
| Power consumption | 38W |
| Degree of protection | IP20 |
| LED lifetime | L85B10 (tq 25°C) = 50.000h |
| Photometric code | 9 30 / 3 3 9 |
| Photobiological class | RG1 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 1,7kg |

IP20

-220-240V

50-60 Hz

IK 02

RG1

≤3 MacAdam

LOW POWER L90B10 50.000h

MEDIUM POWER L85B10 50.000h

CE

UK CA