

## Midpoint-W7

Spotlight for wall surface mounting - Direct/indirect light distribution

Article code: PW7BSE-940AM-SK




Illustrations may only be similar and serve as an orientation.

Midpoint-W7. LED. Spotlight for wall surface mounting. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >90. Reflector with beam angle MEDIUM 20°. Reflector: Radiant Silver. XICATO/ARTIST (CRI>97). Clear Cover. Switchable. DxHxW (spots). D=90mm.

W=105mm. H=320mm. Medium-power current. 3020lm. 38W. 1,7kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG1 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

## Midpoint-W7

Spotlight for wall surface mounting -  
Direct/indirect light distribution

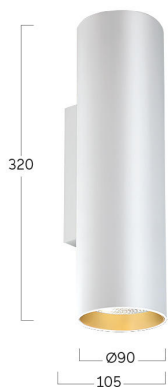

Article code: PW7BSE-940AM-SK

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

|                              |                                     |
|------------------------------|-------------------------------------|
| Productname                  | Midpoint-W7                         |
| Lamp                         | LED                                 |
| Installation Type            | Spotlight for wall surface mounting |
| Surface finish               | Radiant Silver                      |
| Light characteristics        | Direct/indirect light distribution  |
| Colour temperature           | 4000K                               |
| Colour Rendering Index (CRI) | CRI>90                              |
| Reflector Beam Angle         | Reflector: MEDIUM 20°               |
| Reflector Colour Inside      | Reflector: Radiant Silver           |
| LED-Module Type              | XICATO/ARTIST (CRI>97)              |
| Cover                        | Clear Cover                         |
| Control                      | Switchable                          |
| Length L/Diameter D (mm)     | D=90mm                              |
| Width W (mm)                 | W=105mm                             |
| Height H (mm)                | H=320mm                             |
| Current/Power                | Medium-Power                        |
| Luminous Flux                | 3020lm                              |
| Power consumption            | 38W                                 |
| Degree of protection         | IP20                                |
| LED lifetime                 | L85B10 (tq 25°C) = 50.000h          |
| Photometric code             | 9 40 / 3 3 9                        |
| Photobiological class        | RG1 (EN62471)                       |
| Indoor/Outdoor               | Indoor: ta [ambient] max. 25°C      |
| Weight (kg)                  | 1,7kg                               |

