

Midpoint-W7

Spotlight for wall surface mounting - Direct/indirect light distribution

Article code: PW7BSL-927FM-SK




Illustrations may only be similar and serve as an orientation.

Midpoint-W7. LED. Spotlight for wall surface mounting. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct/indirect light distribution. Colour temperature: 2700K (Soft White). Colour Rendering Index (CRI): >90. Reflector with beam angle MEDIUM 20°. Reflector: Radiant Silver. Economic-LED: Highest efficiency, CRI>90. Clear Cover. Dimmable DALI. DxHxW (spots). D=90mm. W=105mm. H=320mm. Medium-

power current. 3160lm. 39W. 1,7kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG1 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Midpoint-W7

Spotlight for wall surface mounting -
Direct/indirect light distribution

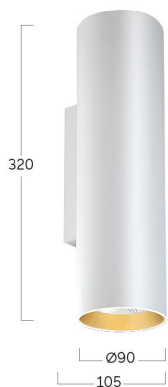

Article code: PW7BSL-927FM-SK

Customer / Project: _____

Note: _____

Productname	Midpoint-W7
Lamp	LED
Installation Type	Spotlight for wall surface mounting
Surface finish	Radiant Silver
Light characteristics	Direct/indirect light distribution
Colour temperature	2700K
Colour Rendering Index (CRI)	CRI>90
Reflector Beam Angle	Reflector: MEDIUM 20°
Reflector Colour Inside	Reflector: Radiant Silver
LED-Module Type	Eco-LED (CRI>90)
Cover	Clear Cover
Control	Dimmable (DALI)
Length L/Diameter D (mm)	D=90mm
Width W (mm)	W=105mm
Height H (mm)	H=320mm
Current/Power	Medium-Power
Luminous Flux	3160lm
Power consumption	39W
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	9 27 / 3 3 9
Photobiological class	RG1 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	1,7kg

