

## Caleo-X6

Surface mounted luminaire - Direct/indirect light distribution    Article code: AX6AWE-827H-Q600-G



Illustrations may only be similar and serve as an orientation.



Caleo-X6. LED. Wall or ceiling mounted luminaire in soft-edge design. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct light distribution and indirect lighting corona. Colour temperature: 2700K (Soft White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR≤19. Reflector: Satin Gold. Switchable. LxWxH (square). L=600mm. W=600mm. H=25+25mm. High-

power current. 8630lm. 73W. 7,1kg. Binning initial ≤ MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

## Caleo-X6

Surface mounted luminaire - Direct/indirect light distribution

Article code: AX6AWE-827H-Q600-G

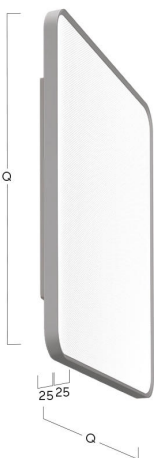

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Caleo-X6
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Snow White
Light characteristics	Direct/indirect light distribution
Colour temperature	2700K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Reflector Colour Inside	Reflector: Satin Gold
Control	Switchable
Length L/Diameter D (mm)	L=600mm
Width W (mm)	W=600mm
Height H (mm)	H=25+25mm
Current/Power	High-Power
Luminous Flux	8630lm
Power consumption	73W
Degree of protection	IP20
LED lifetime	L80B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 27 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	7,1kg

