

Liquid Line-WX

Wall mounted luminaire - Direct/indirect light distribution

Article code: QWXOBE-840M-L600





Illustrations may only be similar and serve as an orientation.

Liquid Line-WX. LED. Wall mounted luminaire. Luminaire body with fine radii made of aluminium, manufactured from a single casting without visible seams. Surface finish Jet Black. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Switchable. LxWxH (rectangular). L= 600mm. W=

40+14mm. H=75mm. Medium-power current. 1960lm. 17W. 2kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Liquid Line-WX

Wall mounted luminaire - Direct/indirect light distribution

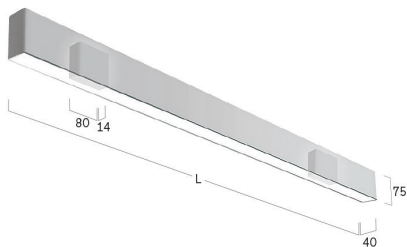

Article code: QWXOBE-840M-L600

Customer / Project: _____

Note: _____

Productname	Liquid Line-WX
Lamp	LED
Installation Type	Wall mounted luminaire
Surface finish	Jet Black
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Switchable
Length L/Diameter D (mm)	L=600mm
Width W (mm)	W=40+14mm
Height H (mm)	H=75mm
Current/Power	Medium-Power
Luminous Flux	1960lm
Power consumption	17W
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	2kg

IP20

~220-240V

50-60 Hz

IK 02

RG0

≤3 MacAdam

MEDIUM POWER L85B10 50000h

HIGH POWER L80B10 50000h

CE

UK CA