

## Cubic-P3

Pendant luminaire - Direct/indirect light distribution

Article code: CP3ASE-827M-Q430-KS



Illustrations may only be similar and serve as an orientation.



Cubic-P3. LED. Pendant luminaire. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct/indirect light distribution. Colour temperature: 2700K (Soft White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Reflector: Radiant Silver. Switchable. LxWxH (square). L=430mm. W=430mm. H=100mm. Cord suspension for parallel installation with power supply cable and ceiling rose (Set). Pendant length max 1500mm. Power supply:

transparent. Ceiling rose: Matching luminaire`s surface colour. Medium-power current. 4077lm. 30W. 6,6kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

## Cubic-P3

Pendant luminaire - Direct/indirect light distribution

Article code: CP3ASE-827M-Q430-KS

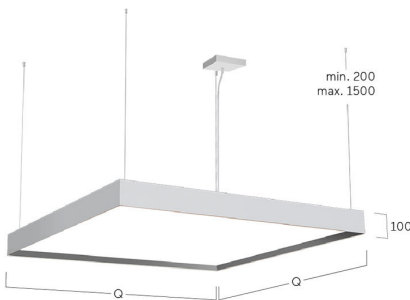

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Cubic-P3
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Radiant Silver
Light characteristics	Direct/indirect light distribution
Colour temperature	2700K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Reflector Colour Inside	Reflector: Radiant Silver
Control	Switchable
Length L/Diameter D (mm)	L=430mm
Width W (mm)	W=430mm
Height H (mm)	H=100mm
Current/Power	Medium-Power
Luminous Flux	4077lm
Power consumption	30W
Suspension	Parallel susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 1500mm
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 27 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	6,6kg

