

Cubic-P3

Pendant luminaire - Direct/indirect light distribution

Article code: CP3OWE-827H-Q530-KG



Illustrations may only be similar and serve as an orientation.



Cubic-P3. LED. Pendant luminaire. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct/indirect light distribution. Colour temperature: 2700K (Soft White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Reflector: Satin Gold. Switchable. LxWxH (square). L=530mm. W=530mm. H=100mm. Cord suspension for parallel installation with power supply cable and ceiling rose (Set). Pendant length

max 1500mm. Power supply: transparent. Ceiling rose: Matching luminaire`s surface colour. High-power current. 10631lm. 78W. 9,1kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Cubic-P3

Pendant luminaire - Direct/indirect light distribution

Article code: CP3OWE-827H-Q530-KG

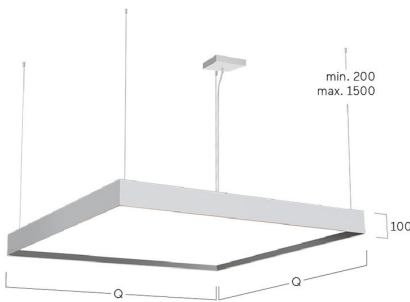

Customer / Project: _____

Note: _____

Productname	Cubic-P3
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Snow White
Light characteristics	Direct/indirect light distribution
Colour temperature	2700K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Reflector Colour Inside	Reflector: Satin Gold
Control	Switchable
Length L/Diameter D (mm)	L=530mm
Width W (mm)	W=530mm
Height H (mm)	H=100mm
Current/Power	High-Power
Luminous Flux	10631lm
Power consumption	78W
Suspension	Parallel susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 1500mm
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L80B10 (tq 25°C) = 50.000h
Photometric code	8 27 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	9,1kg

