


Beam Me Up-P1

Pendant luminaire - Direct/indirect light distribution

Article code: MP1AWE-827M-D400-UW



Illustrations may only be similar and serve as an orientation.

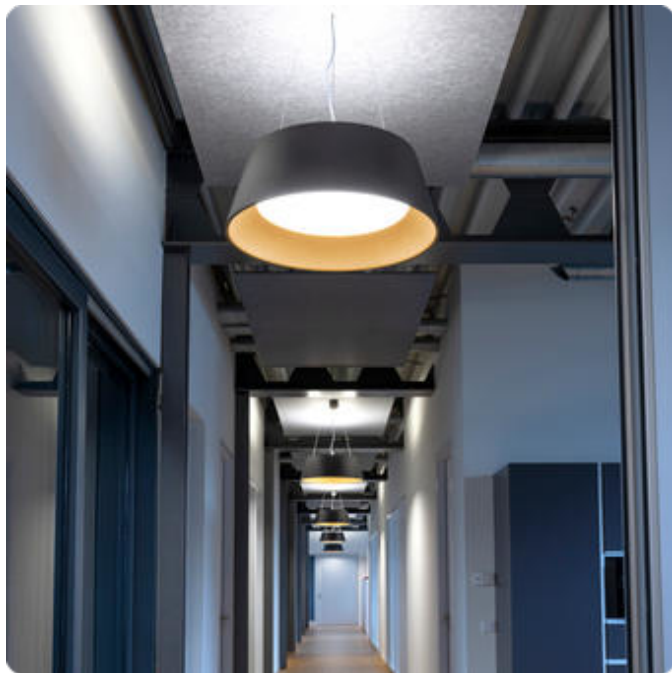


Beam Me Up-P1. LED. Design pendant luminaire, with a setback lens optic in a decorative ring. Luminaire head made of high-quality processed FRP (fiberglass reinforced plastic). Surface finish Snow White. Direct/indirect light distribution. Colour temperature: 2700K (Soft White). Colour Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. UGR<=16. Reflector: Snow White. Switchable. DxH (round). D=400mm. H=160mm. Central cord suspension with ceiling rose and power supply cable (Set). Pendant length max

4000mm. Power supply: transparent. Ceiling rose: Matching luminaire`s surface colour. Medium-power current. 2038lm. 20W. 4kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25° C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Beam Me Up-P1

Pendant luminaire - Direct/indirect light distribution

Article code: MP1AWE-827M-D400-UW



Customer / Project: _____

Note: _____

Productname	Beam Me Up-P1
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Snow White
Light characteristics	Direct/indirect light distribution
Colour temperature	2700K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Reflector Colour Inside	Reflector: Snow White
Control	Switchable
Length L/Diameter D (mm)	D=400mm
Height H (mm)	H=160mm
Current/Power	Medium-Power
Luminous Flux	2038lm
Power consumption	20W
Suspension	Central susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 4000mm
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=16
Photometric code	8 27 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	4kg

