


## Beam Me Up-P1

Pendant luminaire - Direct/indirect light distribution

Article code: MP1OBE-840H-D400-UG

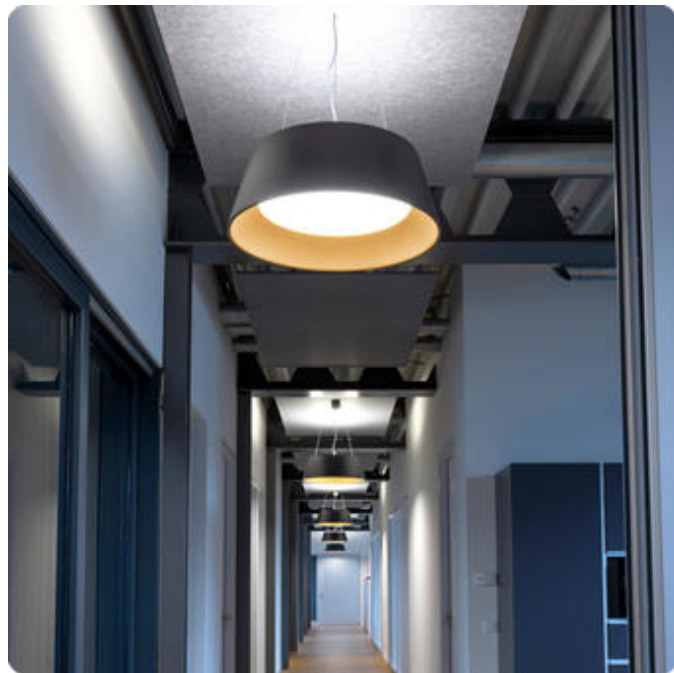

Illustrations may only be similar and serve as an orientation.

Beam Me Up-P1. LED. Design pendant luminaire, with a setback lens optic in a decorative ring. Luminaire head made of high-quality processed FRP (fiberglass reinforced plastic). Surface finish Jet Black. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Reflector: Satin Gold. Switchable. DxH (round). D=400mm. H=160mm. Central cord suspension with ceiling rose and power supply cable (Set). Pendant length max

4000mm. Power supply: transparent. Ceiling rose: Matching luminaire`s surface colour. High-power current. 3270lm. 32W. 4kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25° C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.


## Beam Me Up-P1

Pendant luminaire - Direct/indirect light distribution

Article code: MP1OBE-840H-D400-UG

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_



Productname	Beam Me Up-P1
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Jet Black
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Reflector Colour Inside	Reflector: Satin Gold
Control	Switchable
Length L/Diameter D (mm)	D=400mm
Height H (mm)	H=160mm
Current/Power	High-Power
Luminous Flux	3270lm
Power consumption	32W
Suspension	Central susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 4000mm
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L80B10 (tq 25°C) = 50.000h
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	4kg

