


## Vision-P4

Pendant luminaire - Direct/indirect light distribution

Article code: VP4LBE-840M-Lxxxx-KG

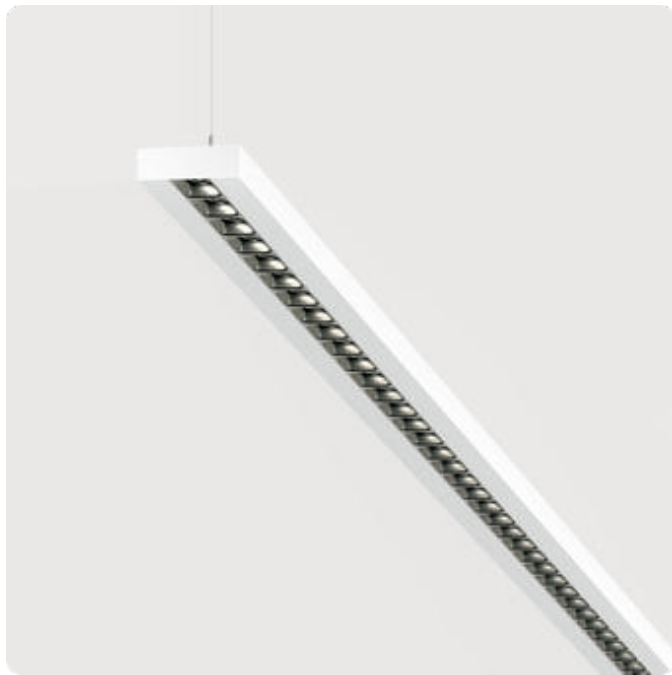

Illustrations may only be similar and serve as an orientation.




Vision-P4. LED. Pendant luminaire. Luminaire body made of high-quality aluminum profile. Surface finish Jet Black. Direct/indirect light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre. High glare limitation, compatible for office applications. UGR<=16. Reflector: Satin Gold. Switchable, according to drawing. LxWxH (rectangular). Special length L=xxxxmm. W=125mm. H=40mm. Cord suspension for parallel installation with power supply cable and ceiling rose (Set). Pendant

length max 1500mm. Power supply: transparent. Ceiling rose: Matching luminaire`s surface colour. Medium-power current. 4960lm/m. 35W/m. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

## Vision-P4

Pendant luminaire - Direct/indirect light distribution

Article code: VP4LBE-840M-Lxxxx-KG

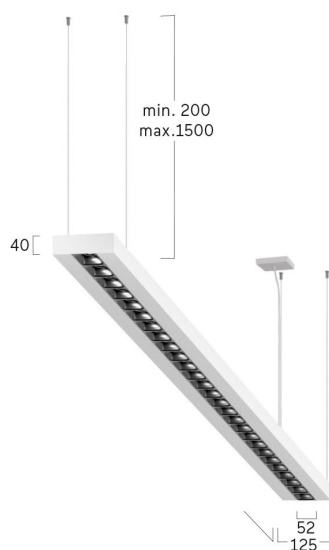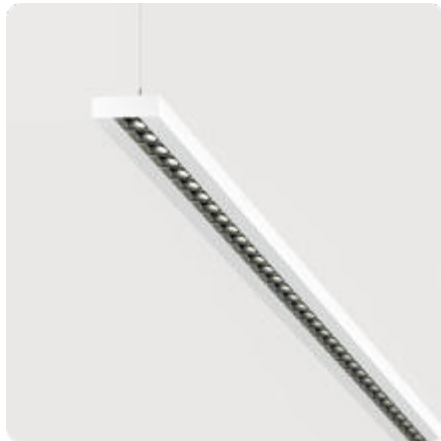

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Vision-P4
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Jet Black
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Satin Gold
Control	Switchable
Length L/Diameter D (mm)	Special length L=xxxxmm
Width W (mm)	W=125mm
Height H (mm)	H=40mm
Current/Power	Medium-Power
Luminous Flux	4960lm/m
Power consumption	35W/m
Suspension	Parallel susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Pendant length (mm)	Pendant length max 1500mm
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=16
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Other	according to drawing

