

Ringo Star-GY Acoustic Oblong

Acoustic pendant luminaire - Direct light distribution

Article code: RGYLWL-830E-O61-KG-GF



Illustrations may only be similar and serve as an orientation.

Ringo Star-GY Acoustic Oblong. LED. Acoustic pendant luminaire. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Lens Louvre: precision lenses with louvre. High glare limitation, compatible for office applications. UGR<=19. Reflector: Satin Gold. Dimmable DALI. L/DxWxH (oval). L/D=1790/600mm. W=40mm. H=40mm. Cord suspension for parallel installation with power supply cable and ceiling rose (Set). Pendant length max 4000mm. Power supply: transparent. Ceiling

rose: Matching luminaire`s surface colour. Low-power current. 6498lm. 53W. Binning initial <= MacAdam 3. Internal sound absorber for a wide frequency spectrum, to reduce the reverberation time in Green Fabric. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,2%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L90B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.



Ringo Star-GY Acoustic Oblong

Acoustic pendant luminaire - Direct light distribution

Article code: RGYLWL-830E-O61-KG-GF

Customer / Project: _____

Note: _____

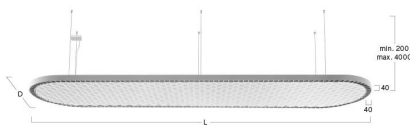

Productname	Ringo Star-GY Acoustic Oblong
Lamp	LED
Installation Type	Acoustic pendant luminaire
Surface finish	Snow White
Light characteristics	Direct light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Lens Louvre
Reflector Colour Inside	Reflector: Satin Gold
Control	Dimmable (DALI)
Length L/Diameter D (mm)	L/D=1790/600mm
Width W (mm)	W=40mm
Height H (mm)	H=40mm
Current/Power	Low-Power
Luminous Flux	6498lm
Power consumption	53W
Suspension	Parallel susp. (Set)
Ceiling rose colour	Ceiling rose: Matching luminaire`s surface colour
Seillänge (mm) min-max	200-4000
Acoustic absorber	Absorber (Green Fabric)
Degree of protection	IP20
Cable Colour	Power supply: transparent
LED lifetime	L90B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C

