


Matric Déco A9 | Surface

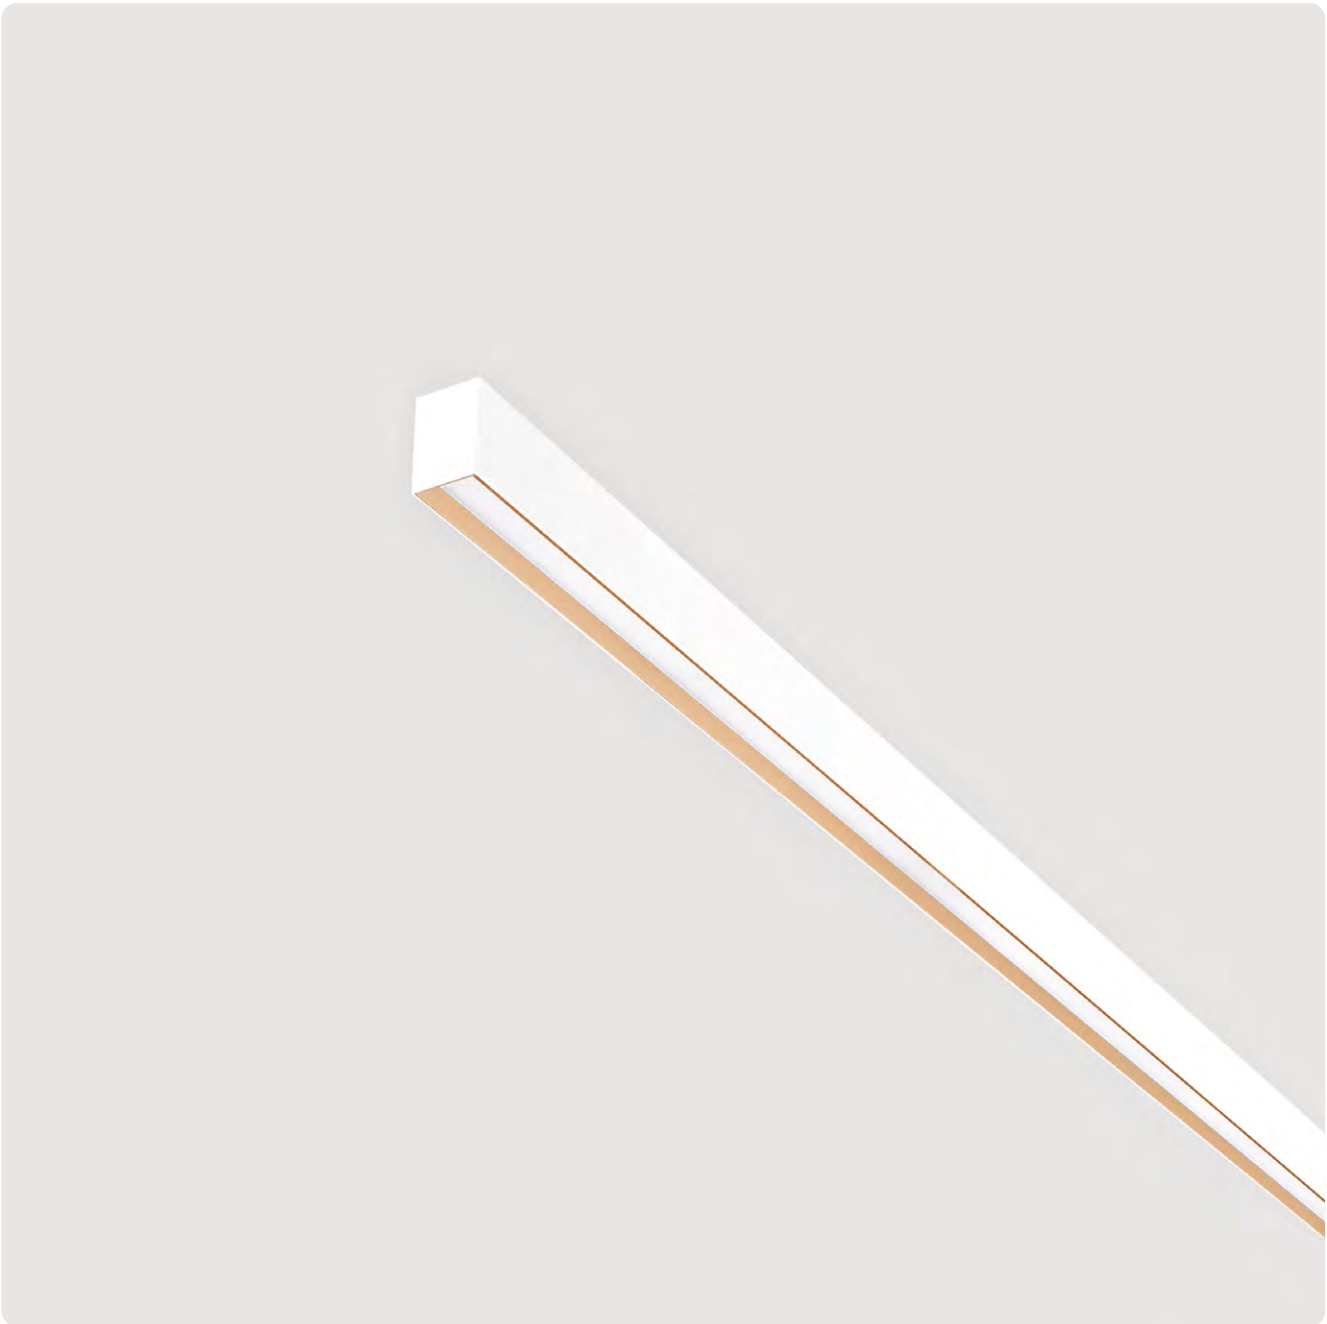

FR Luminaire LED pour montage mural ou saillie/plafonnier. Éclairage uniquement direct. Canal lumineux en profilé d'aluminium - largeur 55mm. Fabrication sur-mesure au millimètre près suivant besoins et spécifications. Optique en retrait pour un meilleur anti-éblouissement et effet de lumière décoratif. Surface du luminaire et bague du réflecteur arrondi disponibles en différentes combinaisons et couleurs au choix. Options: Lightnet-Surface-Collection ou RAL au choix. Éclairage direct par lentilles avec grille BAP pour une large répartition de l'intensité lumineuse et facteur très bas (UGR<19) adapté aux bureaux. Grille anti-éblouissement disponible en plusieurs finitions. Diffuseur microprismatique en verre acrylique avec éblouissement optimisé pour utilisations dans les bureaux/poste de travail. Diffuseur opal satiné pour éclairage avec transmission maximale et répartition homogène des points lumineux. Convertisseur intégré dans le luminaire, au choix allumage ON/OFF ou dimmable (DALI, Touch-Dim, Casambi). Température de couleur 2200K, 2700K, 3000K, 3500K, 4000K, 6500K ou Tunable White (2700-6500K). Binning initial $\leq$ MacAdam 3. Rendu de couleur IRC > 80, IRC > 90 ou Full Spectrum. Options: Intégration de rails et projecteurs, composants d'éclairage de secours, technologie de sensor/cellule, tout comme une multitude d'autres options au choix.

ES LED surface-mounted luminaire for walls or ceilings. Direct only light distribution. Light channel made of 55mm wide aluminium profile. Bespoke lengths possible. Recessed screen with optimized glare reduction and decorative lighting impact. Outer housing and all-around reflector ring available in various finishes and combinations. Further surface options see Lightnet-Surface-Collection or RAL of your choice. Direct light using precision lenses with louvre for wide uniform symmetrical light distribution with high glare limitation (UGR<19) especially for workplaces. Louvre available in various colour finishes. Microprismatic screen made of special acrylic glass with optimized glare reduction especially for workplaces. Satin opal diffuser for general lighting with maximum transmittance and homogeneous lighting. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI, Touch-Dim, Casambi). Colour temperature 2200K, 2700K, 3000K, 3500K, 4000K, 6500K or Tunable White (2700-6500K). Binning $\leq$ MacAdam 3. Colour rendering CRI > 80, CRI > 90 or Full Spectrum. On request: Integration of tracks and spotlights, emergency lighting components, sensor technology and many other options.

L A9 LWE - 8 30 E - L1209-B*

Product Family	L: Matric
Type	A9: Direct only
Optical System	A: Microprismatic, O: Opal Diffuser, L: Lens Louvre*
Surface Finish	W: Snow White, V: Ivory White, A: Satin Silver, E: Silver Anodised, U: Urban Graphite, B: Jet Black, H: Anodic Champagne, K: Satin Copper
Control Gear	E: On/Off, L: DALI, H: Touch-Dim, C: Casambi [L890-L2055], 6: DALI DT6 for TW [L1182-L2055], 8: DALI DT8 for TW [L890-L2055]
Colour Rendering	8: CRI>80, 9: CRI>90, F: Full Spectrum [except 2200K]
Colour Temperature	22: 2200K, 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K, TW: Tunable White 2700-6500K
Power	E: Low Power, M: Medium Power, H: High Power
Size	Luminaire Length in mm (Microprismatic, Opal Diffuser): L600, L890, L1182, L1475, L1765, L2055 Luminaire Length in mm (Lens Louvre*): L681, L945, L1209, L1474, L1738, L2002
Lens Louvre*	W: Snow White, V: Ivory White, A: Satin Silver, U: Urban Graphite, B: Jet Black, H: Anodic Champagne, K: Satin Copper, G: Satin Gold
On Request	Emergency Module [L1182-L2055]



Lens Louvre Direct			Microprismatic Direct			Opal Diffuser Direct		
L mm	Lumen/Watt Low Power	Lumen/Watt High Power	L mm	Lumen/Watt Low Power	Lumen/Watt High Power	L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
681	1120lm/9W	2050lm/17W	600	590lm/6W	1050lm/11W	600	860lm/8W	1180lm/11W
945	1560lm/12W	2870lm/23W	890	880lm/9W	1580lm/16W	890	1300lm/12W	1770lm/16W
1209	2010lm/16W	3690lm/29W	1182	1170lm/12W	2100lm/20W	1182	1740lm/15W	2360lm/20W
1474	2460lm/19W	4510lm/35W	1475	1470lm/14W	2630lm/25W	1475	2180lm/18W	2950lm/25W
1738	2910lm/22W	5330lm/41W	1765	1760lm/17W	3150lm/30W	1765	2600lm/22W	3530lm/30W
2002	3350lm/25W	6150lm/47W	2055	2050lm/21W	3680lm/36W	2055	3040lm/27W	4130lm/36W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

