

Ringo Star Acoustic Oblong S2 | Floor




DE LED-Akustik-Stehleuchte direkt-indirektstrahlend. Leuchtenkörper aus Aluminiumprofil mit 40mm Profillbreite. Sondermaße auf Anfrage möglich. Oberfläche weiß, silber, graphit, schwarz, kupfer oder bronzefarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Innenliegender Schallabsorber für breites Frequenzspektrum zur Reduktion der Nachhallzeit. Direktanteil über Präzisionslinsen mit Abblendraster für breite rotationssymmetrische Lichtstärkeverteilung bei gleichzeitig hoher Blendungsbegrenzung ($UGR < 19$) speziell für Office-Anwendungen. Abblendraster in verschiedenen Farbkombinationen erhältlich. Intuitives Bedienfeld im Leuchtenmast für getrennt stufenlose Dimmung und Schaltung der Kammern für Direkt-/Indirektlicht, bei Tunable White oder Integration von Multisensor- oder Schwarmtechnologie gemeinsame Steuerung der Lichtkammern. Optional: HCL-Control für automatisches, dem Tagesverlauf angepasstes, biodynamisches Licht. Farbtemperatur 2200K, 2700K, 3000K, 3500K, 4000K, 6500K oder Tunable White (2700-6500K). Binning initial $\leq$ MacAdam 3. Farbwiedergabe $CRI > 80$, $CRI > 90$ oder Full Spectrum. Fußplatte aus Stahl, Lackierung passend Leuchtenkörper. 4m Anschlusskabel mit länderspezifischem Stecker (EU, CH, UK).

EN LED acoustic free-standing luminaire. Direct-indirect light distribution. Luminaire body made of aluminium profile with 40mm profile width. Special dimensions available on request. Surface white, silver, graphite, black, copper or bronze coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Internal sound absorber for a wide frequency spectrum, to reduce the reverberation time. Direct light using precision lenses with louvre for wide uniform symmetrical light distribution with high glare limitation ($UGR < 19$) for workplaces. Louvre available in various colour finishes. Intuitive pole mounted control panel for dimming and switching the direct/indirect light separately, joint control of the light chambers with Tunable White or integration of multi-sensor or swarm technology. Optional: HCL Control for automatic, time dependent, biodynamic lighting. Colour temperature 2200K, 2700K, 3000K, 3500K, 4000K, 6500K or Tunable White (2700-6500K). Binnings $\leq$ MacAdam 3. Colour rendering $CRI > 80$, $CRI > 90$ or Full Spectrum. Steel Base plate, colour matching luminaire body. 4m power cable with country-specific plug (EU, CH, UK).

R S2 L W X-8 30 M-O1-UB-A-TF

Product Family	R: Ringo Star
Type	S2: Direct-Indirect
Optical System	L: Lens Louvre*
Surface Finish	W: Snow White, V: Ivory White, A: Satin Silver, S: Radiant Silver, U: Urban Graphite, B: Jet Black, X: Satin Bronze, K: Satin Copper
Control Gear	X: Separately Dimmable, M: Multisensor, R: Swarm Control, B: HCL, C: Casambi
Colour Rendering	8: CRI>80, 9: CRI>90, F: Full Spectrum [except 2200K]
Colour Temperature	22: 2200K, 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K, TW: Tunable White 2700-6500K
Power	M: Medium Power
Size	Luminaire Dimension: O1- L772 D376
Base	U: U- Cut Out**
Lens Louvre*	W: Snow White, A: Satin Silver, B: Jet Black, X: Satin Bronze, K: Satin Copper, G: Satin Gold
Plug	A: Schuko CEE 7/7 (Type E+F), B: CH T12 (Type J), C: UK BS 1363 (Type G), D: Wieland, E: WAGO
Acoustic Absorb.	CF: Cream Fabric, GF: Green Fabric, TF: Taupe Fabric, AF: Antracite Fabric

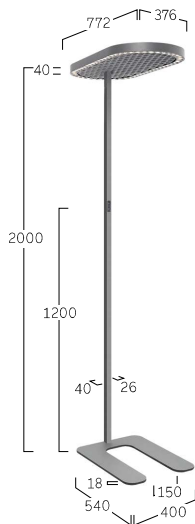

**Bases with Soft Corners

**Lens Louvre | Direct-Indirect**

Lumen/Watt
Medium Power

11700lm/78W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

**CF** Cream Fabric**GF** Green Fabric**TF** Taupe Fabric**AF** Antracite Fabric

W Snow White
W Snow White



W Snow White
A Satin Silver



W Snow White
B Jet Black



W Snow White
X Satin Bronze



W Snow White
K Satin Copper



W Snow White
G Satin Gold