

Cubic Evolution G5/P5 | 300mm Suspended

**Housing:**

Extruded Aluminum. LED pendant luminaire. Direct-Indirect or Direct only light distribution. Fully enclosed.

Optical System:

Microprismatic screen with optimized glare reduction especially for workplaces. Satin opal diffuser for general lighting with maximum transmittance and homogeneous lighting.

Surface Finish:

Surface natural anodized or white, graphite, black or champagne coated. Further surface options see Lightnet-Surface-Collection. RAL or PANTONE of your choice.

Control:

Integral electronic driver dimmable 0-10V. Minimum dimming level 1%. Field replaceable. On request: DALI, DMX, Lutron, Casambi.

LED:

Available color temperatures: 2200K, 2700K, 3000K, 3500K, 4000K, 6500K, or Tunable White. All color temperatures available in CRI>80 or CRI>90. Optionally FULL SPECTRUM-LEDs for highest Fidelity Levels (Tm30). Tolerance within a 3-step MacAdam ellipse. Up to 110lm/W efficacy. Choice of different lumen output levels: Medium or High Power. Custom lumen output upon request. Lifetime minimum 50,000h with 85% of lumen maintenance.

Installation:

Height-adjustable parallel or Y-cord suspension with transparent power supply cable or rod suspension. Color of canopy matching luminaire body.

Certification & Warranty:

cETLus. 5 Years Warranty.


Order Guide

Product Family	1C: Cubic	1C P5 A B E-8 30 M-L900-Y
Type	G5: Direct only, P5: Direct-Indirect	
Optical System	A: Microprismatic, O: Opal Diffuser	
Surface Finish	W: Snow White, E: Silver Anodized, U: Urban Graphite, B: Jet Black, H: Anodic Champagne	
Control Gear	E: On/Off, D: 0-10V	
Color Rendering	8: CRI>80, 9: CRI>90, F: Full Spectrum [except 2200K]	
Color Temperature	22: 2200K, 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K, TW: Tunable White 2700-6500K	
Power	M: Medium Power, H: High Power	
Size	Luminaire Length in mm: L900 (35.375"), L1200 (47.25"), L1500 (59")	
Suspension	K: Parallel Suspension, Y: Y-Cord Suspension	
On Request	DALI, DMX, Lutron System, Casambi	




Light Performance

Microprismatic | Direct-Indirect




L inch	Lumen/Watt Medium Power	Lumen/Watt High Power
35.375"	5220lm/39W	7430lm/55W
47.25"	6990lm/51W	9910lm/74W
59"	8590lm/62W	12350lm/91W

Microprismatic | Direct




L inch	Lumen/Watt Medium Power	Lumen/Watt High Power
35.375"	3220lm/25W	4600lm/35W
47.25"	4290lm/33W	6140lm/48W
59"	5370lm/40W	7670lm/59W

Opal Diffuser | Direct-Indirect



L inch	Lumen/Watt Medium Power	Lumen/Watt High Power
35.375"	5030lm/39W	7140lm/55W
47.25"	6740lm/51W	9510lm/74W
59"	8270lm/62W	11850lm/91W

Opal Diffuser | Direct



L inch	Lumen/Watt Medium Power	Lumen/Watt High Power
35.375"	3030lm/25W	4310lm/35W
47.25"	4040lm/33W	5740lm/48W
59"	5050lm/40W	7170lm/59W


Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

Dimensions

Parallel Suspension:




Y-Cord Suspension:

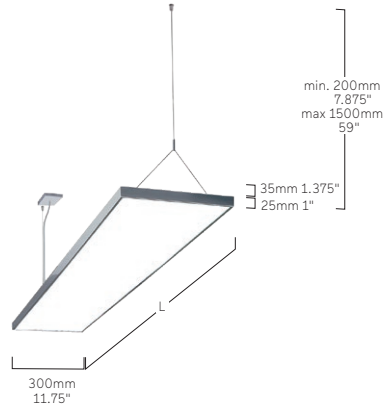

Surfaces



W Snow White




E Silver Anodized



U Urban Graphite



B Jet Black











H Anodic Champagne



RAL on demand

CUBIC EVOLUTION G5/P5 | 300MM SUSPENDED

1. MOUNTING AND INSTALLATION | MONTAGE ET INSTALLATION:

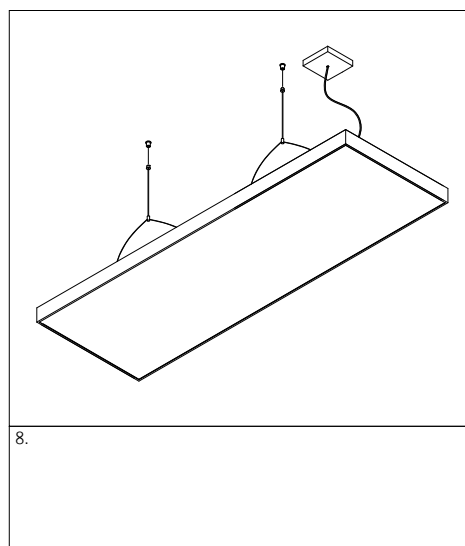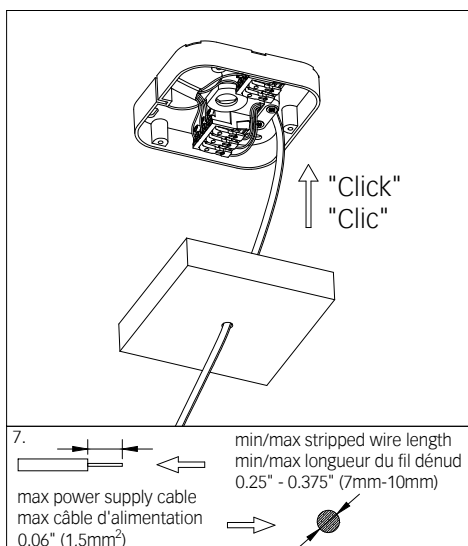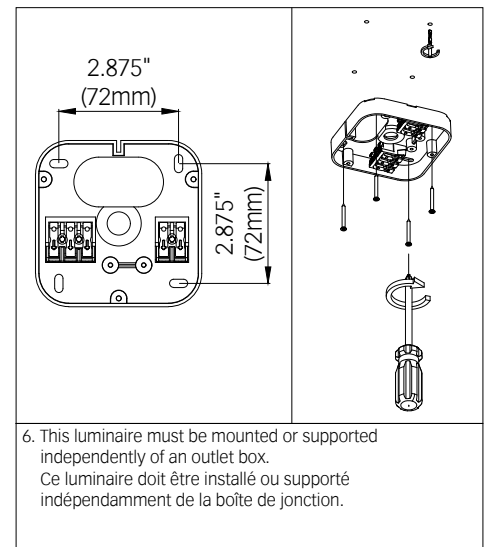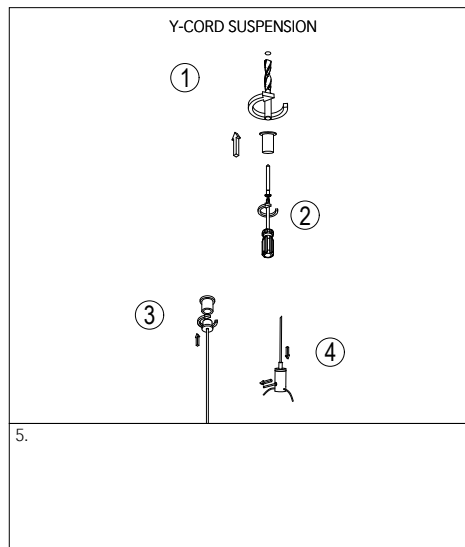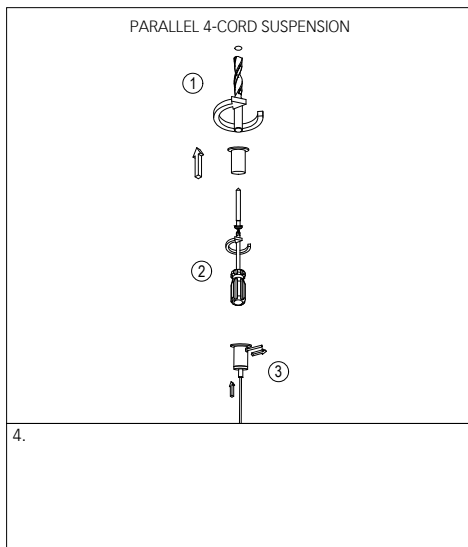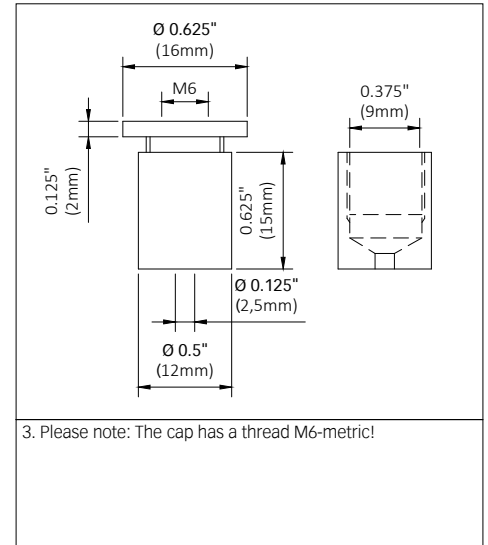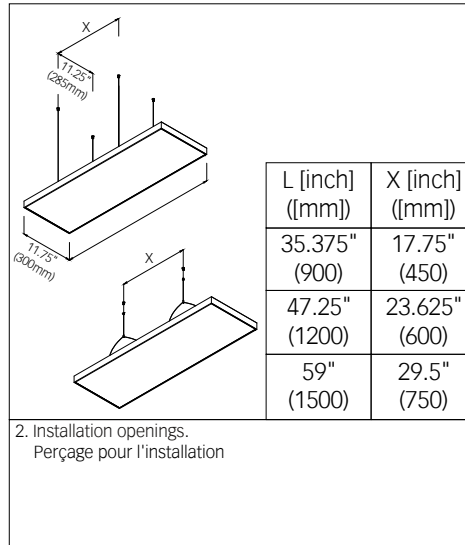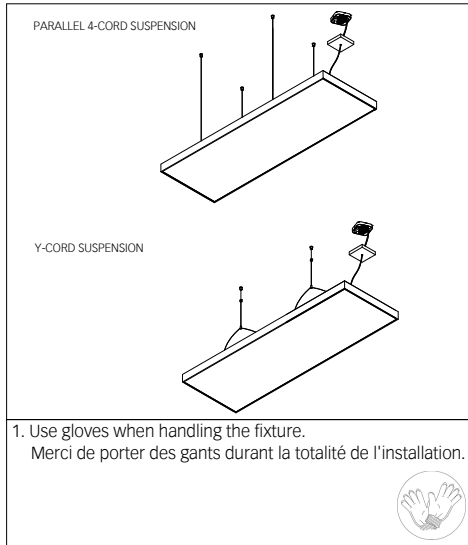

WARNING: RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

IMPORTANT: EXACT DIMENSIONS IN MM!

ATTENTION: RISQUE D'INCENDIE ET D'ÉLECTROCUTION. LE LUMINAIRE DOIT ÊTRE INSTALLÉ PAR UN ÉLECTRICIEN QUALIFIÉ, CONFORMÉMENT AUX NORMES NATIONALES EN VIGUEUR, CODES DE CONSTRUCTION ET D'ÉLECTRICITÉ LOCAUX. DÉBRANCHEZ L'ALIMENTATION AU PANNEAU ÉLECTRIQUE AVANT DE PROCÉDER À L'ENTRETIEN.

IMPORTANT: LES DIMENSIONS EXACTES SONT EN MM!