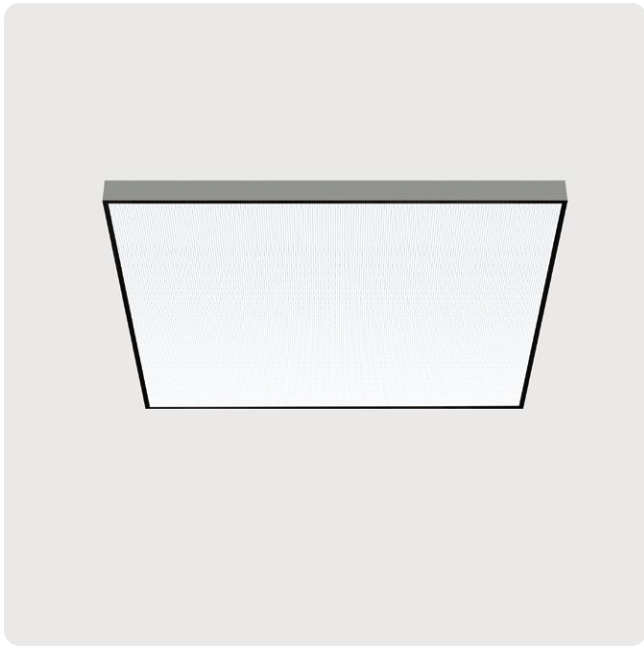


Cubic Neo A9 | Surface

**Housing:**

Extruded Aluminum. LED surface-mounted luminaire for walls or ceilings with overall height of 1.375" profile. Direct only light distribution. Fully enclosed.

Optical System:

Microprismatic screen with optimized glare reduction especially for workplaces. Satin opal diffuser for general lighting with maximum transmittance and homogeneous lighting.

Surface Finish:

Surface natural anodized or white, graphite, black or champagne coated. Further surface options see Lightnet-Surface-Collection. RAL or PANTONE of your choice.

Control:

Integral electronic driver dimmable 0-10V. Minimum dimming level 1%. Field replaceable. On request: DALI, DMX, Lutron, Casambi.

LED:

Available color temperatures: 2200K, 2700K, 3000K, 3500K, 4000K, 6500K, or Tunable White. All color temperatures available in CRI>80 or CRI>90. Optionally FULL SPECTRUM-LEDs for highest Fidelity Levels (Tm30). Tolerance within a 3-step MacAdam ellipse. Up to 110lm/W efficacy. Choice of different lumen output levels: Medium or High Power. Custom lumen output upon request. Lifetime minimum 50,000h with 85% of lumen maintenance.

Certification & Warranty:

cETLus. 5 Years Warranty.


Order Guide

Product Family	1C: Cubic	
Type	A9: Direct only	
Optical System	A: Microprismatic, O: Opal Diffuser	
Surface Finish	W: Snow White, E: Silver Anodized, U: Urban Graphite, B: Jet Black, H: Anodic Champagne	
Control Gear	E: On/Off, D: 0-10V	
Color Rendering	8: CRI>80, 9: CRI>90, F: Full Spectrum [except 2200K]	
Color Temperature	22: 2200K, 27: 2700K, 30: 3000K, 35: 3500K, 40: 4000K, 65: 6500K, TW: Tunable White 2700-6500K	
Power	M: Medium Power, H: High Power	
Size	Square size in mm: Q400 (15.75"), Q500 (19.625"), Q600 (23.625"), Q800 (31.5")	
On Request	DALI, DMX, Lutron System, Casambi	


1C A9 A B E-8 30 M-Q600




Light Performance

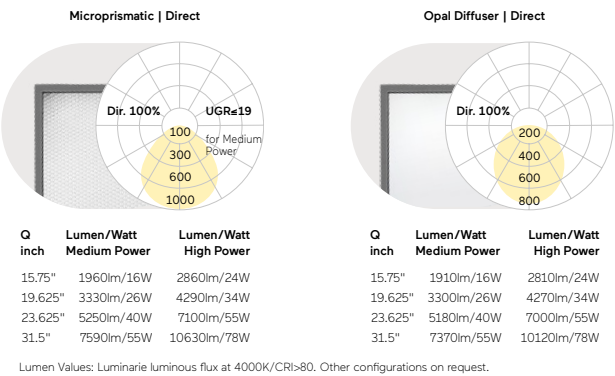

Dimensions











Surfaces

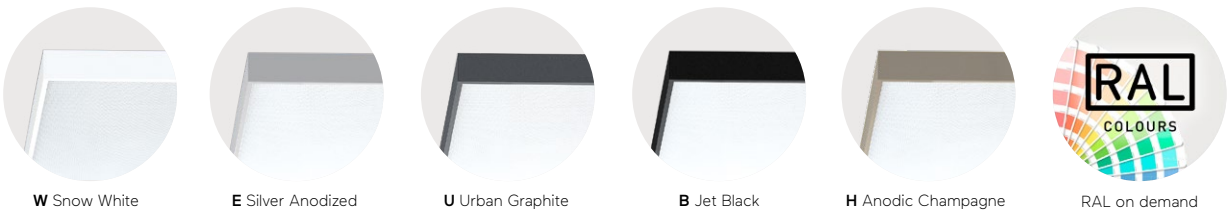

CUBIC NEO A9 | SURFACE

Q300 - Q400

1. MOUNTING AND INSTALLATION | MONTAGE ET INSTALLATION:

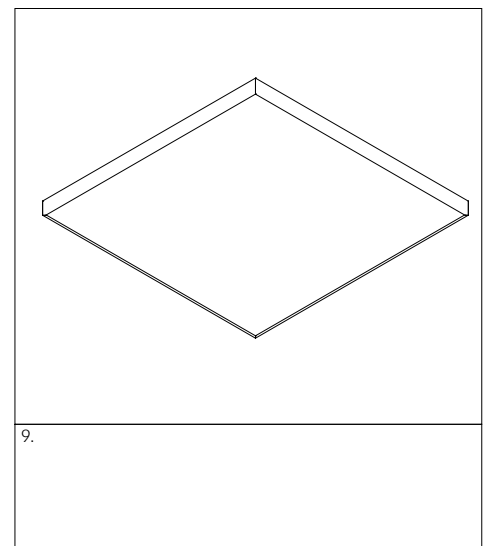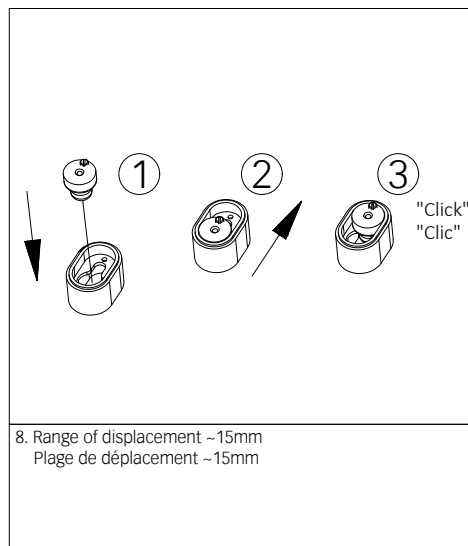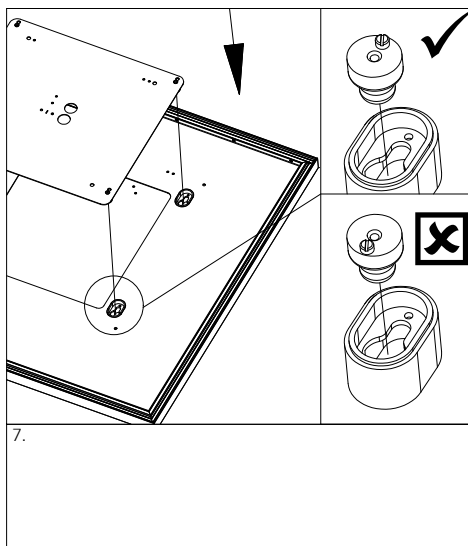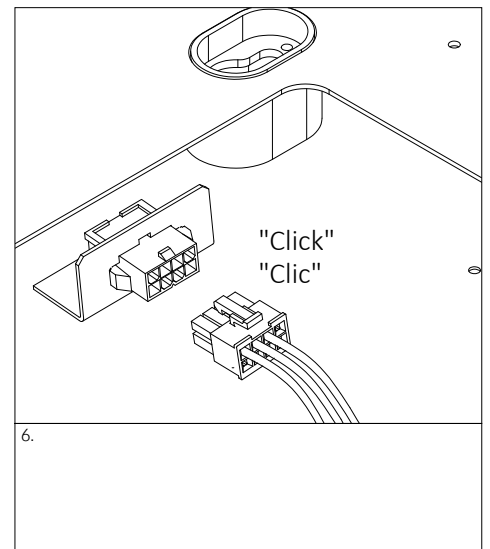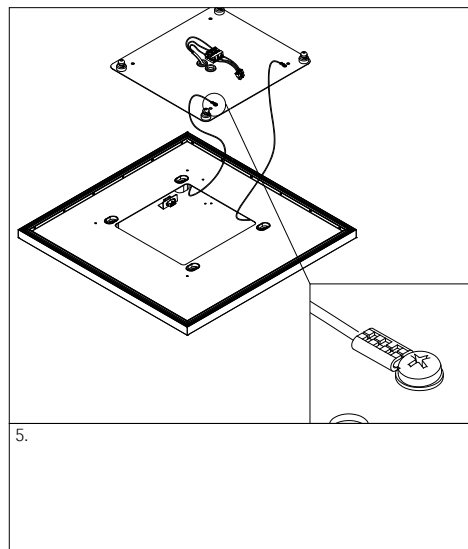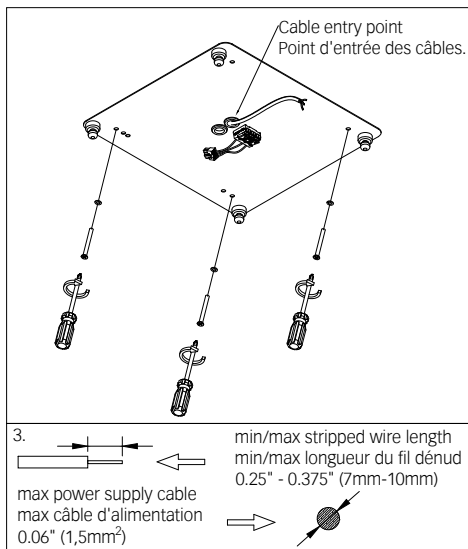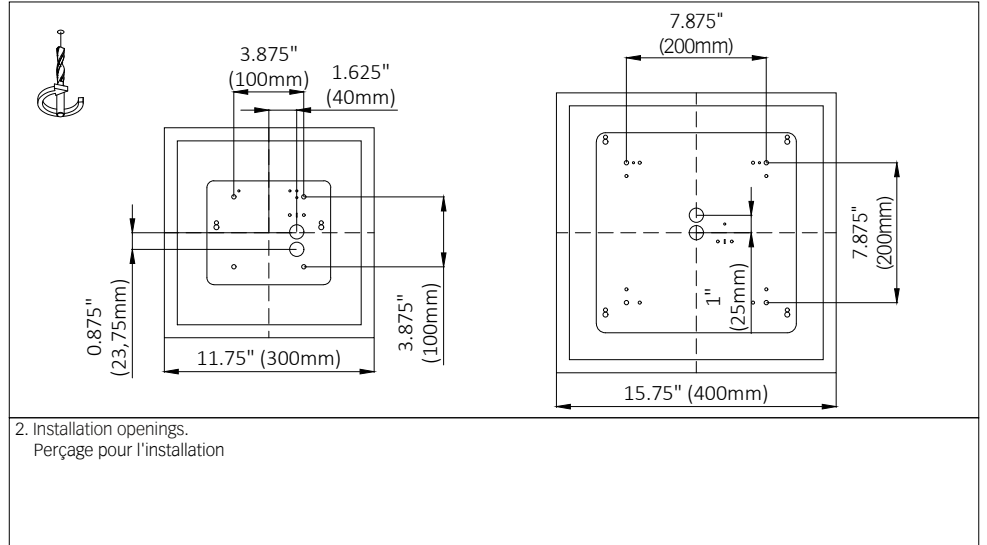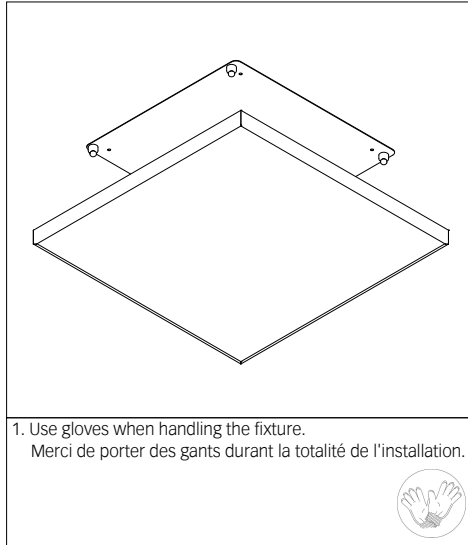

WARNING: RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

IMPORTANT: EXACT DIMENSIONS IN MM!


ATTENTION: RISQUE D'INCENDIE ET D'ÉLECTROCUTION. LE LUMINAIRE DOIT ÊTRE INSTALLÉ PAR UN ÉLECTRICIEN QUALIFIÉ, CONFORMÉMENT AUX NORMES NATIONALES EN VIGUEUR, CODES DE CONSTRUCTION ET D'ÉLECTRICITÉ LOCAUX. DÉBRANCHEZ L'ALIMENTATION AU PANNEAU ÉLECTRIQUE AVANT DE PROCÉDER À L'ENTRETIEN.

IMPORTANT: LES DIMENSIONS EXACTES SONT EN MM!


CUBIC NEO A9 | SURFACE

Q500 - Q800







1. MOUNTING AND INSTALLATION | MONTAGE ET INSTALLATION:

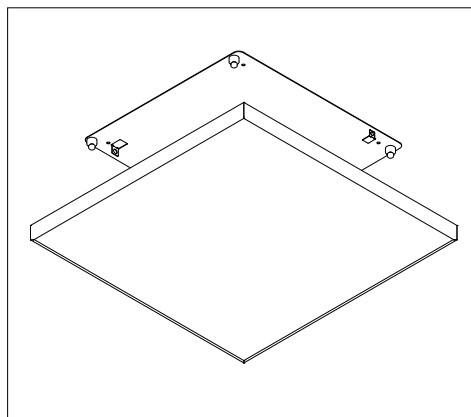

1. Use gloves when handling the fixture.
Merci de porter des gants durant la totalité de l'installation.

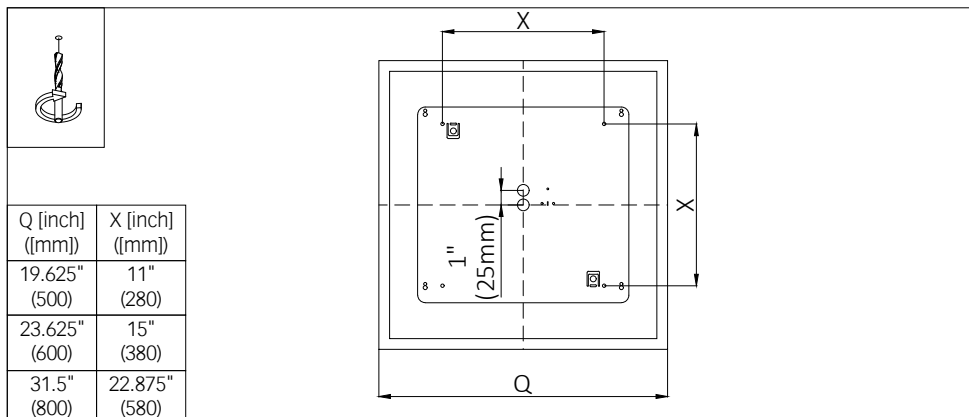

2. Installation openings.
Perçage pour l'installation

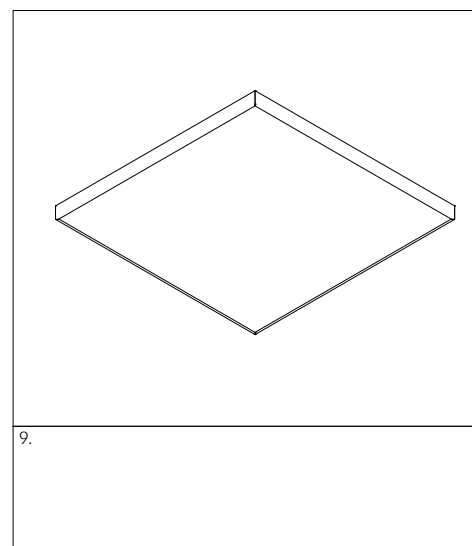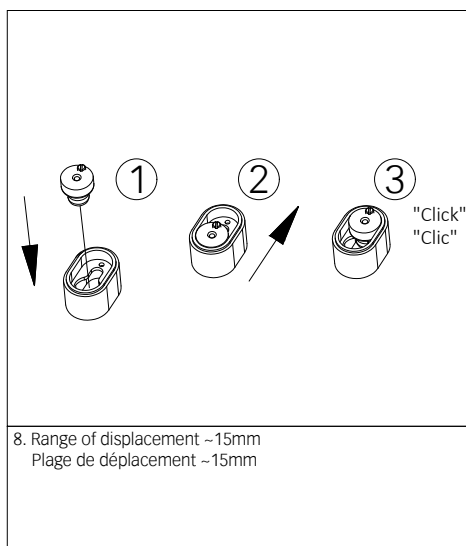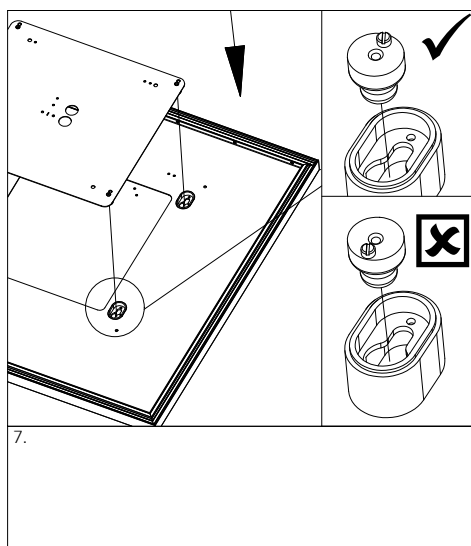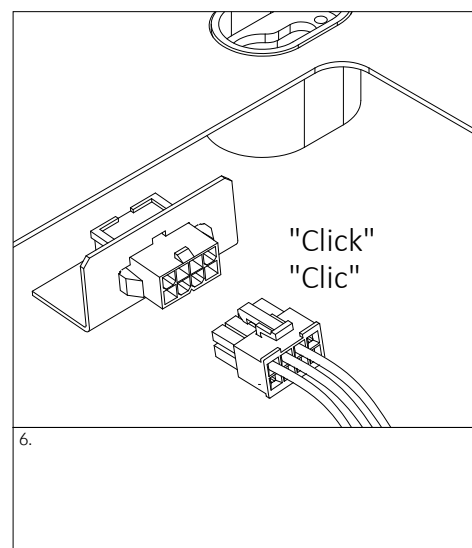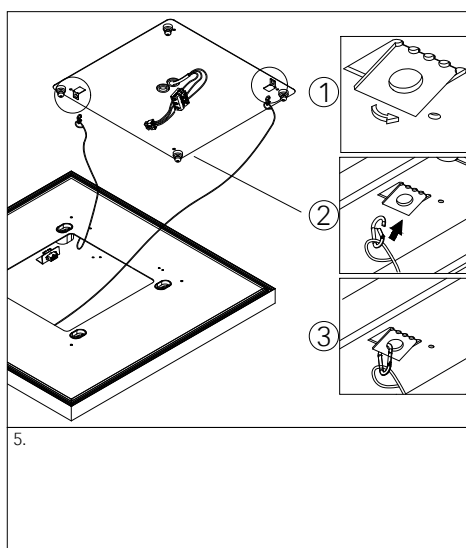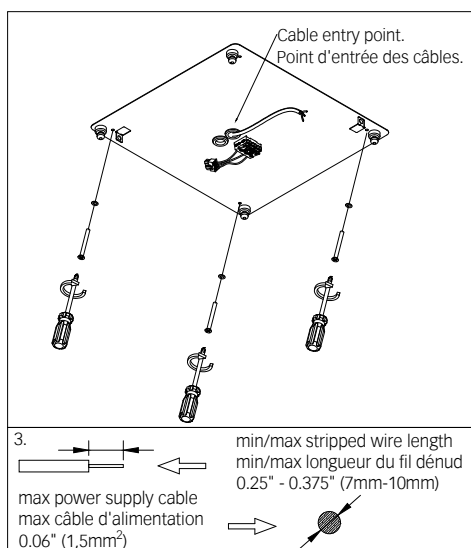

WARNING: RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.

IMPORTANT: EXACT DIMENSIONS IN MM!

ATTENTION: RISQUE D'INCENDIE ET D'ÉLECTROCUTION. LE LUMINAIRE DOIT ÊTRE INSTALLÉ PAR UN ÉLECTRICIEN QUALIFIÉ, CONFORMÉMENT AUX NORMES NATIONALES EN VIGUEUR, CODES DE CONSTRUCTION ET D'ÉLECTRICITÉ LOCAUX. DÉBRANCHEZ L'ALIMENTATION AU PANNEAU ÉLECTRIQUE AVANT DE PROCÉDER À L'ENTRETIEN.

IMPORTANT: LES DIMENSIONS EXACTES SONT EN MM!