

Ringo Star Chandelier G1/P1 | 4" Suspended

**Housing:**

Extruded Aluminum. Direct-indirect or direct-only light distribution. LED chandelier designed for professional use in lobbies, restaurants, etc. with high lumen packages and decorative lighting effect. Three ring Ringo Star-P1/G1 structure, each wrapped with a thread-like material (Trevira CS, flame retardant, fire class DIN 4102 B1, NFPA 701, colors: white or black). The thread length is max. 16' each and can ordered in shorter lengths to suit specification. Fully enclosed and damp rated.

Optical System:

Satin opal diffuser for general lighting with maximum transmittance and homogeneous lighting.

Surface Finish:

Available in white, silver, graphite, black, champagne or copper coated as standard. Further surface options see Lightnet-Surface-Collection. RAL or PANTONE of your choice.

Control:

Integral electronic driver dimmable 0-10V. Minimum dimming level 1%. Field replaceable. On request: DALI, DMX, Lutron, Casambi.

LED:

Available color temperatures: 2200K, 2700K, 3000K, 3500K, 4000K, 6500K, or Tunable White. All color temperatures available in CRI>80 or CRI>90. Optionally FULL SPECTRUM-LEDs for highest Fidelity Levels (Tm30). Tolerance within a 3-step MacAdam ellipse. Up to 110lm/W efficacy. Choice of different lumen output levels: Low or Medium Power. Lifetime minimum 50,000h with 85% of lumen maintenance.


Installation:

Each individual ring has a separate, height-adjustable parallel-cord suspension allowing the distances between each ring to be specified. Transparent power feed cable with canopy location of your choice. Colors canopy match to luminaire body.

Certification & Warranty:


cETLus. 5 Years Warranty.

Light Performance

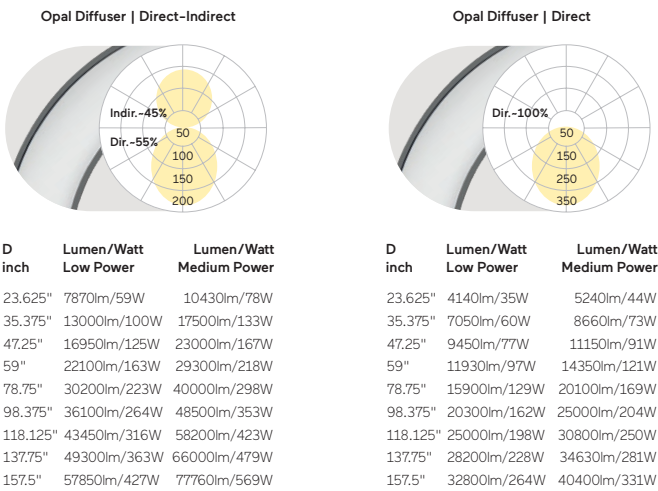

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

Dimensions

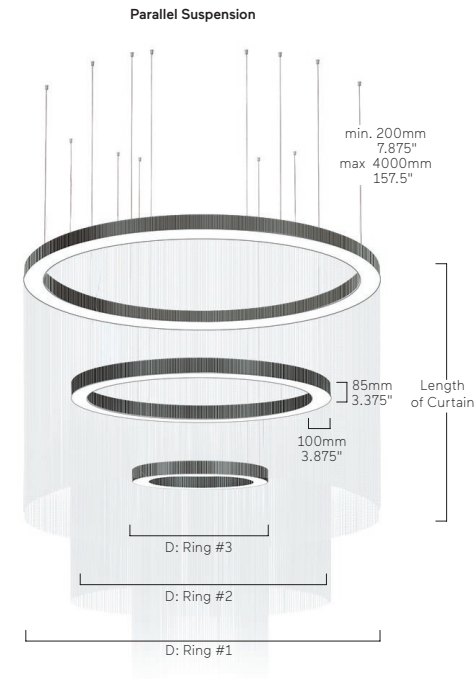

Surfaces

