

# lightnet


## Ringo Star Cluster-G3

Cluster-Pendant luminaire - Direct light distribution

Article code: 1RG3OWE-830M-#rings



Illustrations may only be similar and serve as an orientation.

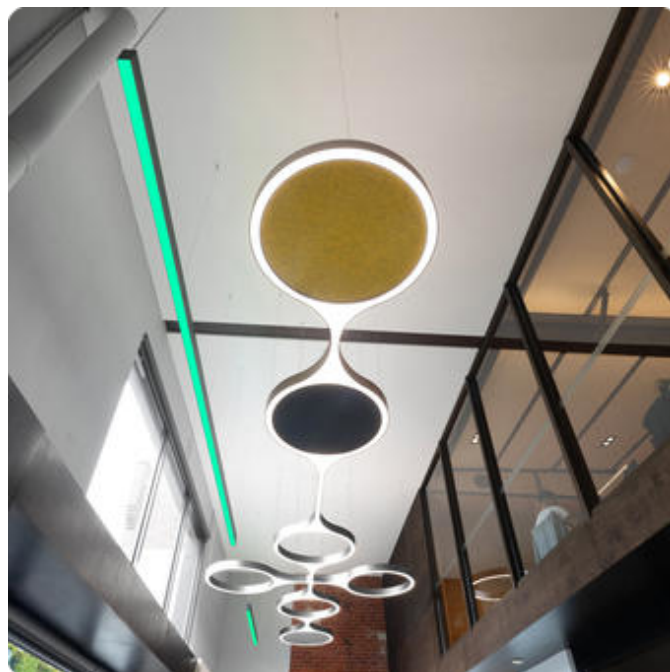

Ringo Star Cluster-G3. LED. Pendant light system with various combinations of the different X, Y and circular modules. Direct only light distribution. Color temperature: 3000K (Warm White). Color Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Surface finish Snow White. Switchable. according to drawing. D=39,4"/Ring. W=2,4". H=3,3". Pendant length max 158". Power supply: transparent.

Canopy: Matching luminaire`s surface color. Medium-power current. Im on request. W on request. IP20. cETLus. Protection class I. Binning initial <= MacAdam 3. A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). 5 years warranty. Manufacturer: Lightnet USA Inc

Ringo Star Cluster-G3



Cluster-Pendant luminaire - Direct light distribution

Article code: 1RG3OWE-830M-#rings



Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

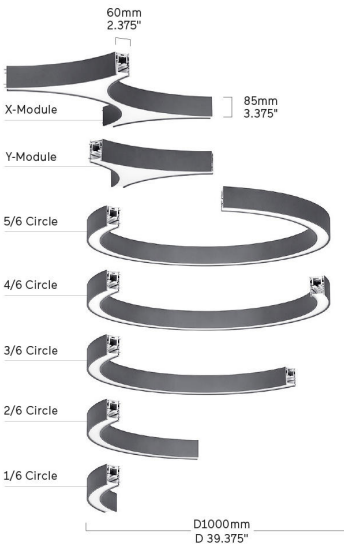

|                             |                                |
|-----------------------------|--------------------------------|
| Productname                 | Ringo Star Cluster-G3          |
| Lamp                        | LED                            |
| Installation Type           | Cluster-Pendant luminaire      |
| Surface finish              | Snow White                     |
| Light characteristics       | Direct light distribution      |
| Color temperature           | 3000K                          |
| Color Rendering Index (CRI) | CRI>80                         |
| Optical system              | Opal diffuser                  |
| Control                     | Switchable                     |
| Length L/Diameter D (in)    | D=39,4"/Ring                   |
| Width W (in)                | W=2,4"                         |
| Height H (in)               | H=3,3"                         |
| Current/Power               | Medium-Power                   |
| Luminous Flux               | lm on request                  |
| Power consumption           | W on request                   |
|                             | Pendant length max 158"        |
| Degree of protection        | IP20                           |
| LED lifetime                | L85/50,000h (tq 25°C)          |
| Indoor/Outdoor              | Indoor: ta [ambient] max. 25°C |
| Certification               | cETLus                         |
| Other                       | according to drawing           |

