

Matric-M5

Recessed mounted ceiling luminaire (trimless) - Direct light distribution

Article code: 1LM5OEE-840E-L890-B



Illustrations may only be similar and serve as an orientation.

Matric-M5. LED. Recessed mounted luminaire for frameless installation in plasterboard ceilings, light channel made of 3.25" wide aluminum profile. Surface finish Silver Anodised. Installation brackets (set) incl. Direct only light distributioColor temperature: 4000K (Cool White). Color Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Switchable.

LxWxH (rectangular). L=35". W=3,2". H=3,2". Low-power current. 1800lm. 15W. 7,9lbs. Binning initial <= MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Matric-M5



Recessed mounted ceiling luminaire (trimless) -
Direct light distribution

Article code: 1LM5OEE-840E-L890-B



Customer / Project: _____

Note: _____

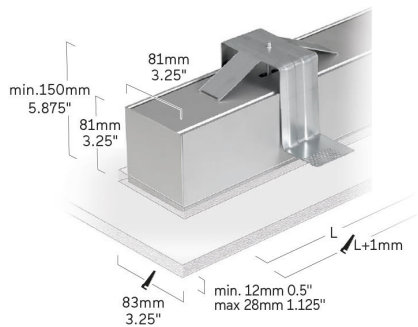

Productname	Matric-M5
Lamp	LED
Installation Type	Recessed mounted ceiling luminaire (trimless)
Surface finish	Silver Anodised
Installation	Installation brackets (set) incl
Light characteristics	Direct light distribution
Color temperature	4000K
Color Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Switchable
Length L/Diameter D (in)	L=35"
Width W (in)	W=3,2"
Height H (in)	H=3,2"
Current/Power	Low-Power
Luminous Flux	1800lm
Power consumption	15W
Voltage	120-277V
Degree of protection	IP20
Certification	cETLus
LED lifetime	L85/50,000h (tq 25°C)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	7,9lbs

IP20

-120-277V

50-60 Hz

IK 02

RG0

≤3 MACADAM

L85/50000h

CE