

# lightnet


## Cubic-P5

Pendant luminaire - Direct/indirect light distribution

Article code: 1CP5OED-840H-L1200-K



Illustrations may only be similar and serve as an orientation.

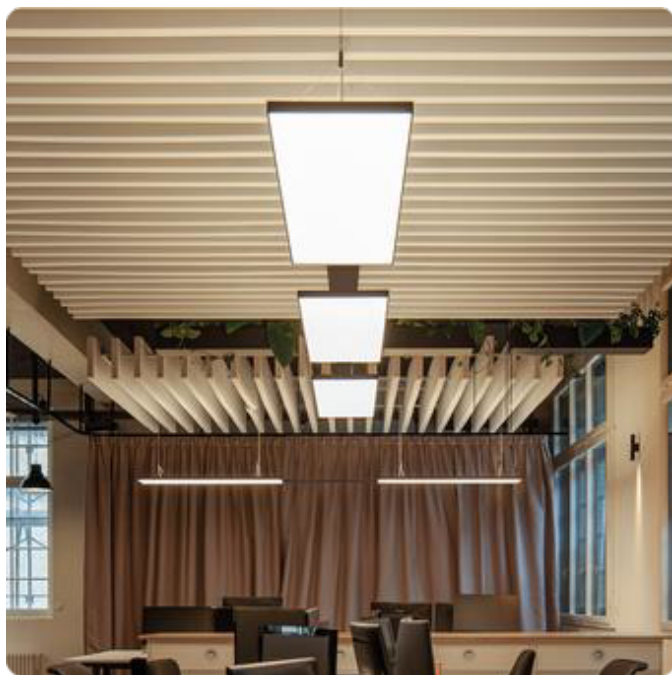


Cubic-P5. LED. Pendant luminaire. Direct/indirect light distribution. Opal diffuser for enhanced light transmission and perfect uniform illumination. Surface finish Silver Anodised. Single dimmed 0-10V. Color Rendering Index (CRI): >80. Color temperature: 4000K (Cool White). High-power current. LxWxH (rectangular). L=47,2". W=11,8". H= 1"+1,4". Cord suspension for parallel installation with power supply cable and canopy (Set). Pendant length max

59". Power supply: transparent. Canopy: Matching luminaire`s surface color. 9510lm. 74W. Binning initial <= MacAdam 3. 15,4lbs. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Cubic-P5

Pendant luminaire - Direct/indirect light distribution



Article code: 1CP5OED-840H-L1200-K

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Cubic-P5
Lamp	LED
Installation Type	Pendant luminaire
Light characteristics	Direct/indirect light distribution
Optical system	Opal diffuser
Surface finish	Silver Anodised
Control	Dimmable (0-10V)
Color Rendering Index (CRI)	CRI>80
Color temperature	4000K
Current/Power	High-Power
Length L/Diameter D (in)	L=47,2"
Width W (in)	W=11,8"
Height H (in)	H=1"+1,4"
Luminous Flux	9510lm
Power consumption	74W
Voltage	120-277V
Degree of protection	IP20
Suspension	Parallel cord susp (Set) Pendant length max 59"
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	15,4lbs

