

lightnet

Ringo Star-PY

Pendant luminaire - Direct/indirect light distribution

Article code: 1RPYCWD-840M-D2000-K



Illustrations may only be similar and serve as an orientation.





Ringo Star-PY. LED. Pendant luminaire made with 1.625" profile width. Direct/indirect light distribution. Opal Flex Diffuser. Surface finish Snow White. Single dimmed 0-10V. Color Rendering Index (CRI): >80. Color temperature: 4000K (Cool White). Medium-power current. DxHxW (round). D=78,7". W=1,6". H=1,6". Cord suspension for parallel installation with power supply cable and canopy (Set). Pendant length max 158". Power supply: transparent. Canopy

matching luminaire`s surface color with integrated driver. 22160lm. 239W. Binning initial <= MacAdam 3. 30,9lbs. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Ringo Star-PY

Pendant luminaire - Direct/indirect light distribution

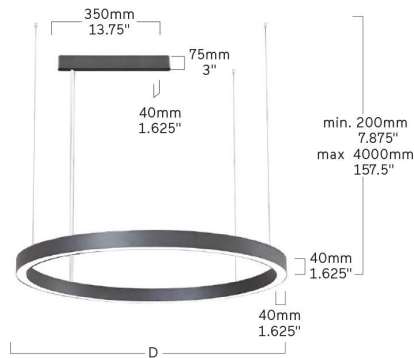

Article code: 1RPYCWD-840M-D2000-K

Customer / Project: _____

Note: _____

Productname	Ringo Star-PY
Lamp	LED
Installation Type	Pendant luminaire
Light characteristics	Direct/indirect light distribution
Optical system	Opal Flex Diffuser
Surface finish	Snow White
Control	Dimmable (0-10V)
Color Rendering Index (CRI)	CRI>80
Color temperature	4000K
Current/Power	Medium-Power
Length L/Diameter D (in)	D=78,7"
Width W (in)	W=1,6"
Height H (in)	H=1,6"
Luminous Flux	22160lm
Power consumption	239W
Voltage	120-277V
Degree of protection	IP20
Suspension	Parallel cord susp (Set) Pendant length max 158"
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	30,9lbs

