

# lightnet

## Liquid Line-GX

Pendant light system - Direct light distribution

Article code:

1QGXCBD-835H-STRUCTURE-Lxxxx-A





Illustrations may only be similar and serve as an orientation.

Liquid Line-GX. LED. Pendant light system. Direct only light distribution. Opal Flex Diffuser. Surface finish Jet Black. Single dimmed 0-10V. Color Rendering Index (CRI): >80. Color temperature: 3500K (Neutral White). High-power current. according to drawing. LxWxH (flexible). L=xxxx". W=1,6". H=2,6". Pendant length max 59". Power supply: transparent. Canopy: Matching luminaire`s surface color.

670lm/feet. 7W/feet. Binning initial <= MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Liquid Line-GX

Pendant light system - Direct light distribution

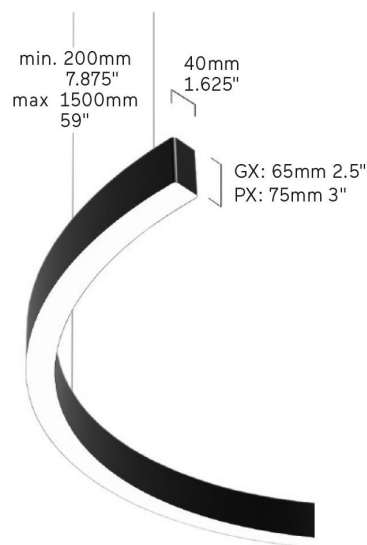

Article code:  
1QGXCBD-835H-STRUCTURE-Lxxxx-A

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Liquid Line-GX
Lamp	LED
Installation Type	Pendant light system
Light characteristics	Direct light distribution
Optical system	Opal Flex Diffuser
Surface finish	Jet Black
Control	Dimmable (0-10V)
Color Rendering Index (CRI)	CRI>80
Color temperature	3500K
Current/Power	High-Power
Length L/Diameter D (in)	L=xxxx"
Width W (in)	W=1,6"
Height H (in)	H=2,6"
Luminous Flux	670lm/feet
Power consumption	7W/feet
Voltage	120-277V
Degree of protection	IP20
LED lifetime	Pendant length max 59"
Certification	L85/50,000h (tq 25°C)
Indoor/Outdoor	cETLus
Other	Indoor: ta [ambient] max. 25°C according to drawing

