

# lightnet

## Ringo Star-G1

Pendant luminaire - Direct light distribution

Article code: 1RG1ABD-827M-D1200-K



Illustrations may only be similar and serve as an orientation.





Ringo Star-G1. LED. Pendant luminaire made of 3.875" profile width. Direct only light distribution. Microprismatic screen foreduced luminance in office areas. Surface finish Jet Black. Single dimmed 0-10V. Color Rendering Index (CRI): >80. Color temperature: 2700K (Soft White). Medium-power current. DxHxW (round). D=47,2". W=3,9". H=3,3". Cord suspension for parallel installation with power supply cable and canopy (Set). Pendant length max 158". Power supply:

transparent. Canopy: Matching luminaire`s surface color. 9724lm. 91W. Binning initial <= MacAdam 3. 28,7lbs. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Ringo Star-G1

Pendant luminaire - Direct light distribution

Article code: 1RG1ABD-827M-D1200-K

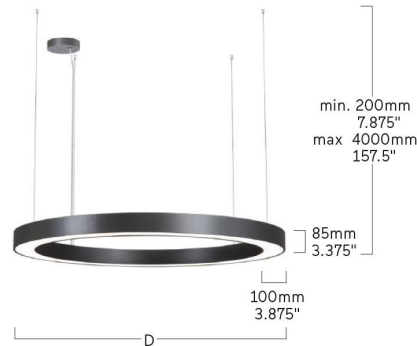

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Ringo Star-G1
Lamp	LED
Installation Type	Pendant luminaire
Light characteristics	Direct light distribution
Optical system	Microprismatic screen
Surface finish	Jet Black
Control	Dimmable (0-10V)
Color Rendering Index (CRI)	CRI>80
Color temperature	2700K
Current/Power	Medium-Power
Length L/Diameter D (in)	D=47,2"
Width W (in)	W=3,9"
Height H (in)	H=3,3"
Luminous Flux	9724lm
Power consumption	91W
Voltage	120-277V
Degree of protection	IP20
Suspension	Parallel cord susp (Set) Pendant length max 158"
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	28,7lbs

