

# lightnet

## Ringo Star-G1

Pendant luminaire - Direct light distribution

Article code: 1RG1ABE-830M-D5000-K



Illustrations may only be similar and serve as an orientation.





Ringo Star-G1. LED. Pendant luminaire made of 3.875" profile width. Direct only light distribution. Microprismatic screen foreduced luminance in office areas. Surface finish Jet Black. Switchable. Color Rendering Index (CRI): >80. Color temperature: 3000K (Warm White). Medium-power current. DxHxW (round). D=196,9". W=3,9". H=3,3". Cord suspension for parallel installation with power supply cable and canopy (Set). Pendant length max 158". Power supply: transparent.

Canopy: Matching luminaire`s surface color. 45207lm. 421W. Binning initial <= MacAdam 3. 127,9lbs. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Ringo Star-G1

Pendant luminaire - Direct light distribution

Article code: 1RG1ABE-830M-D5000-K

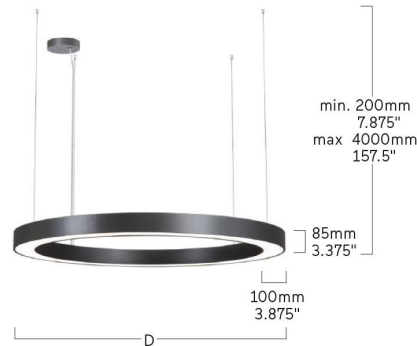

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

|                             |   |
|-----------------------------|---|
| Productname                 | Ringo Star-G1                                       |
| Lamp                        | LED   |
| Installation Type           | Pendant luminaire                                   |
| Light characteristics       | Direct light distribution                           |
| Optical system              | Microprismatic screen                               |
| Surface finish              | Jet Black   |
| Control                     | Switchable  |
| Color Rendering Index (CRI) | CRI>80  |
| Color temperature           | 3000K   |
| Current/Power               | Medium-Power  |
| Length L/Diameter D (in)    | D=196,9"  |
| Width W (in)                | W=3,9"  |
| Height H (in)               | H=3,3"  |
| Luminous Flux               | 45207lm   |
| Power consumption           | 421W  |
| Voltage                     | 120-277V  |
| Degree of protection        | IP20  |
| Suspension                  | Parallel cord susp (Set)<br>Pendant length max 158" |
| LED lifetime                | L85/50,000h (tq 25°C)                               |
| Certification               | cETLus  |
| Indoor/Outdoor              | Indoor: ta [ambient] max. 25°C                      |
| Weight (lbs)                | 127,9lbs  |

