

lightnet

Ringo Star-G1

Pendant luminaire - Direct light distribution

Article code: 1RG1ASE-840M-D5000-K



Illustrations may only be similar and serve as an orientation.



Ringo Star-G1. LED. Pendant luminaire made of 3.875" profile width. Direct only light distribution. Microprismatic screen foreduced luminance in office areas. Surface finish Radiant Silver. Switchable. Color Rendering Index (CRI): >80. Color temperature: 4000K (Cool White). Medium-power current. DxHxW (round). D=196,9". W=3,9". H=3,3". Cord suspension for parallel installation with power supply cable and canopy (Set). Pendant length max 158". Power supply: transparent.

Canopy: Matching luminaire`s surface color. 48350lm. 421W. Binning initial <= MacAdam 3. 127,9lbs. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Ringo Star-G1



Pendant luminaire - Direct light distribution

Article code: 1RG1ASE-840M-D5000-K



Customer / Project: _____

Note: _____

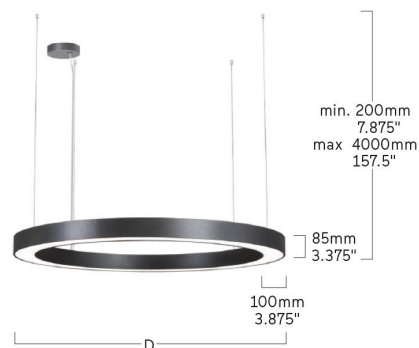

| | |
|-----------------------------|---|
| Productname | Ringo Star-G1 |
| Lamp | LED |
| Installation Type | Pendant luminaire |
| Light characteristics | Direct light distribution |
| Optical system | Microprismatic screen |
| Surface finish | Radiant Silver |
| Control | Switchable |
| Color Rendering Index (CRI) | CRI>80 |
| Color temperature | 4000K |
| Current/Power | Medium-Power |
| Length L/Diameter D (in) | D=196,9" |
| Width W (in) | W=3,9" |
| Height H (in) | H=3,3" |
| Luminous Flux | 48350lm |
| Power consumption | 421W |
| Voltage | 120-277V |
| Degree of protection | IP20 |
| Suspension | Parallel cord susp (Set) Pendant length max 158" |
| LED lifetime | L85/50,000h (tq 25°C) |
| Certification | cETLus |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (lbs) | 127,9lbs |

