


## Ringo Star-P1 Chandelier

Pendant luminaire - Direct/indirect light distribution

Article code: 1RP1OSD-830M-CW543-1500-K



Illustrations may only be similar and serve as an orientation.

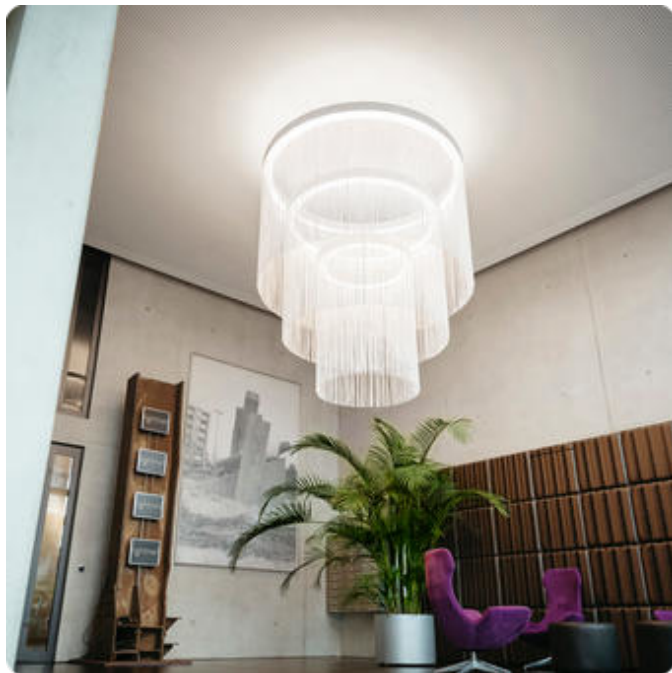



Ringo Star-P1 Chandelier. LED. Pendant luminaire as chandelier designed with high lumen packages and decorative lighting effect. Three ring structure, each wrapped with a thread-like material. Surface finish Radiant Silver. Direct/indirect light distribution. Color temperature: 3000K (Warm White). Color Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Single dimmed 0-10V. D1=78,7". D2=59,1". D3=47,2". W=3,9". H=3,3". White Curtain. Length of Curtain 59,1". Cord suspension for parallel installation with

power supply cable and canopy (Set). Pendant length max 158". Power supply: transparent. Canopy: Matching luminaire`s surface color. Medium-power current. Im on request. W on request. 139,6lbs. Binning initial <= MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Ringo Star-P1 Chandelier

Pendant luminaire - Direct/indirect light distribution

Article code: 1RP1OSD-830M-CW543-1500-K

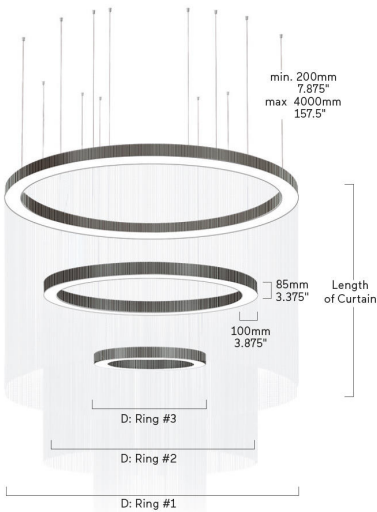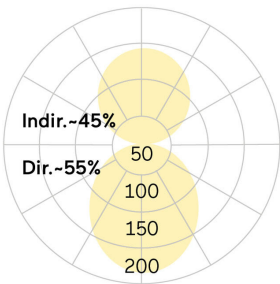

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Ringo Star-P1 Chandelier
Lamp	LED
Installation Type	Pendant luminaire
Surface finish	Radiant Silver
Light characteristics	Direct/indirect light distribution
Color temperature	3000K
Color Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Dimmable (0-10V)
D1 (in)	D1=78,7"
D2 (in)	D2=59,1"
D3 (in)	D3=47,2"
Width W (in)	W=3,9"
Height H (in)	H=3,3"
Current/Power	Medium-Power
Luminous Flux	lm on request
Power consumption	W on request
Voltage	120-277V
Degree of protection	IP20
Suspension	Parallel cord susp (Set) Pendant length max 158"
Certification	cETLus
LED lifetime	L85/50,000h (tq 25°C)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	139,6lbs

