


## Ringo Star-P1 Chandelier

Pendant luminaire - Direct/indirect light distribution

Article code: 1RP1OBD-830M-CW543-1500-K



Illustrations may only be similar and serve as an orientation.

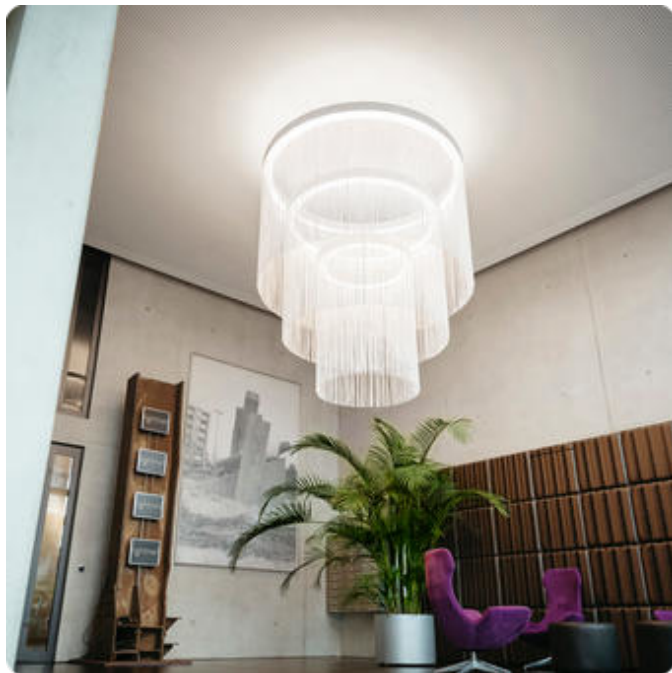



Ringo Star-P1 Chandelier. LED. Pendant luminaire as chandelier designed with high lumen packages and decorative lighting effect. Three ring structure, each wrapped with a thread-like material. Surface finish Jet Black. Direct/indirect light distribution. Color temperature: 3000K (Warm White). Color Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Single dimmed 0-10V. D1=78,7". D2=59,1". D3=47,2". W=3,9". H=3,3". White Curtain. Length of Curtain 59,1". Cord suspension for parallel installation with

power supply cable and canopy (Set). Pendant length max 158". Power supply: transparent. Canopy: Matching luminaire`s surface color. Medium-power current. Im on request. W on request. 139,6lbs. Binning initial <= MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Ringo Star-P1 Chandelier

Pendant luminaire - Direct/indirect light distribution

Article code: 1RP1OBD-830M-CW543-1500-K

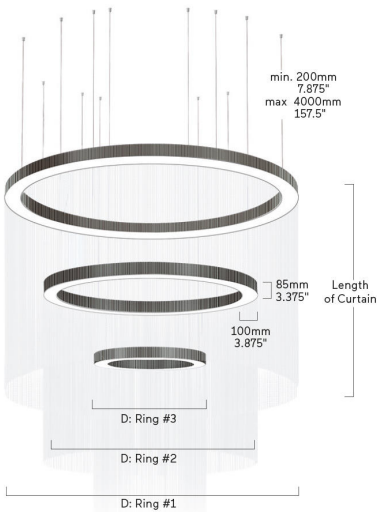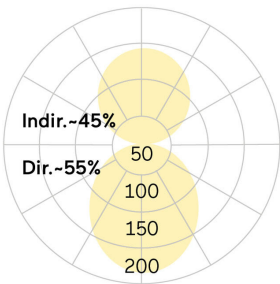

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

|                             |   |
|-----------------------------|---|
| Productname                 | Ringo Star-P1 Chandelier                            |
| Lamp                        | LED   |
| Installation Type           | Pendant luminaire                                   |
| Surface finish              | Jet Black   |
| Light characteristics       | Direct/indirect light distribution                  |
| Color temperature           | 3000K   |
| Color Rendering Index (CRI) | CRI>80  |
| Optical system              | Opal diffuser                                       |
| Control                     | Dimmable (0-10V)                                    |
| D1 (in)                     | D1=78,7"  |
| D2 (in)                     | D2=59,1"  |
| D3 (in)                     | D3=47,2"  |
| Width W (in)                | W=3,9"  |
| Height H (in)               | H=3,3"  |
| Current/Power               | Medium-Power  |
| Luminous Flux               | lm on request                                       |
| Power consumption           | W on request  |
| Voltage                     | 120-277V  |
| Degree of protection        | IP20  |
| Suspension                  | Parallel cord susp (Set)<br>Pendant length max 158" |
| Certification               | cETLus  |
| LED lifetime                | L85/50,000h (tq 25°C)                               |
| Indoor/Outdoor              | Indoor: ta [ambient] max. 25°C                      |
| Weight (lbs)                | 139,6lbs  |

