

lightnet

Basic-P1

Pendant luminaire - Direct/indirect light distribution

Article code: 1BP1AWE-830M-D900-U



Illustrations may only be similar and serve as an orientation.





Basic-P1. LED. Pendant luminaire. Direct/indirect light distribution. Microprismatic screen for reduced luminance in office areas. Surface finish Snow White. $UGR \leq 19$. Switchable. Color Rendering Index (CRI): >80 . Color temperature: 3000K (Warm White). Medium-power current. DxH (round). D=35,4". H=3". Central cord suspension with canopy and power supply cable (Set). Pendant length max 59". Power supply: transparent. Canopy: Matching

luminaire`s surface color. 18139lm. 131W. Binning initial \leq MacAdam 3. 28,9lbs. IP40. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Basic-P1

Pendant luminaire - Direct/indirect light distribution

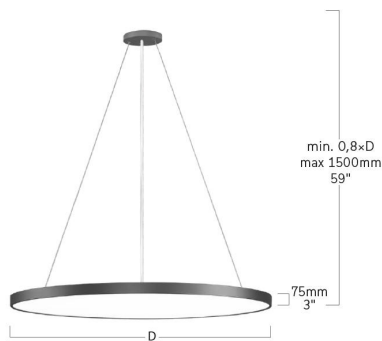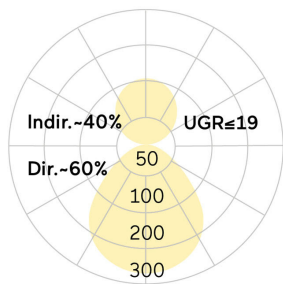

D	D
mm	inch
300	11.75"
400	15.75"
500	19.625"
600	23.625"
900	31.5"
1200	47.25"
1500	59"
2000	78.75"

Article code: 1BP1AWE-830M-D900-U

Customer / Project: _____

Note: _____

Productname	Basic-P1
Lamp	LED
Installation Type	Pendant luminaire
Light characteristics	Direct/indirect light distribution
Optical system	Microprismatic screen
Surface finish	Snow White
Control	Switchable
Color Rendering Index (CRI)	CRI>80
Color temperature	3000K
Current/Power	Medium-Power
Length L/Diameter D (in)	D=35,4"
Height H (in)	H=3"
Luminous Flux	18139lm
Power consumption	131W
Voltage	120-277V
Degree of protection	IP40
UGR	UGR<=19
Suspension	Central cord susp. (Set) Pendant length max 59"
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	28,9lbs

