

# lightnet

## Basic-P1

Pendant luminaire - Direct/indirect light distribution

Article code: 1BP1AWD-840E-D900-U



Illustrations may only be similar and serve as an orientation.



Basic-P1. LED. Pendant luminaire. Direct/indirect light distribution. Microprismatic screen for reduced luminance in office areas. Surface finish Snow White.  $UGR \leq 19$ . Single dimmed 0-10V. Color Rendering Index (CRI):  $>80$ . Color temperature: 4000K (Cool White). Low-power current. D x H (round). D=35,4". H=3". Central cord suspension with canopy and power supply cable (Set). Pendant length max 59". Power supply: transparent. Canopy: Matching

luminaire`s surface color. 12400lm. 82W. Binning initial  $\leq$  MacAdam 3. 28,9lbs. IP40. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

## Basic-P1



Pendant luminaire - Direct/indirect light distribution

Article code: 1BP1AWD-840E-D900-U



Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

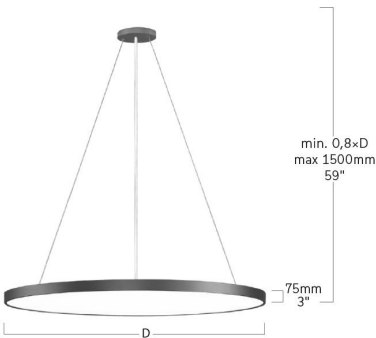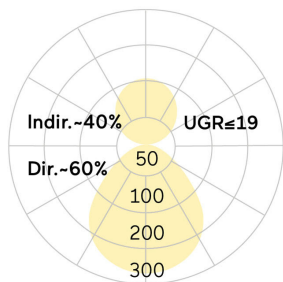

D	D
mm	inch
300	11.75"
400	15.75"
500	19.625"
600	23.625"
900	31.5"
1200	47.25"
1500	59"
2000	78.75"

Productname	Basic-P1
Lamp	LED
Installation Type	Pendant luminaire
Light characteristics	Direct/indirect light distribution
Optical system	Microprismatic screen
Surface finish	Snow White
Control	Dimmable (0-10V)
Color Rendering Index (CRI)	CRI>80
Color temperature	4000K
Current/Power	Low-Power
Length L/Diameter D (in)	D=35,4"
Height H (in)	H=3"
Luminous Flux	12400lm
Power consumption	82W
Voltage	120-277V
Degree of protection	IP40
UGR	UGR<=19
Suspension	Central cord susp. (Set) Pendant length max 59"
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (lbs)	28,9lbs

