

lightnet

Cubic-P5

Pendant luminaire - Direct/indirect light distribution

Article code: 1CP5ABE-830M-L900-Y



Illustrations may only be similar and serve as an orientation.





Cubic-P5. LED. Pendant luminaire. Direct/indirect light distribution. Microprismatic screen for reduced luminance in office areas. Surface finish Jet Black. $UGR \leq 19$. Switchable. Color Rendering Index (CRI): >80 . Color temperature: 3000K (Warm White). Medium-power current. LxWxH (rectangular). L=35,4". W=11,8". H=1"+1,4". Y-cord suspension with power supply cable and canopy (Set). Pendant length max 59". Power supply: transparent. Canopy: Matching luminaire`s

surface color. 4881lm. 39W. Binning initial \leq MacAdam 3. 16,1lbs. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Cubic-P5

Pendant luminaire - Direct/indirect light distribution

Article code: 1CP5ABE-830M-L900-Y

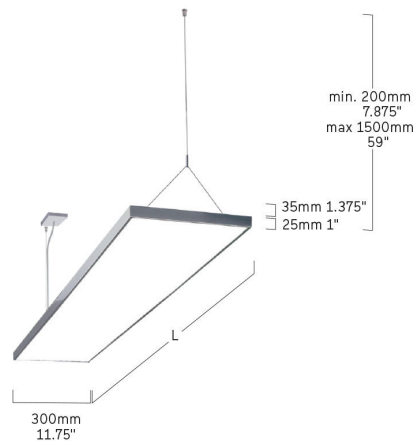

Customer / Project: _____

Note: _____

Productname	Cubic-P5
Lamp	LED
Installation Type	Pendant luminaire
Light characteristics	Direct/indirect light distribution
Optical system	Microprismatic screen
Surface finish	Jet Black
Control	Switchable
Color Rendering Index (CRI)	CRI>80
Color temperature	3000K
Current/Power	Medium-Power
Length L/Diameter D (in)	L=35,4"
Width W (in)	W=11,8"
Height H (in)	H=1"+1,4"
Luminous Flux	4881lm
Power consumption	39W
Voltage	120-277V
Degree of protection	IP20
UGR	UGR<=19
Suspension	Y-susp. (Set)
LED lifetime	Pendant length max 59"
Certification	L85/50,000h (tq 25°C)
Indoor/Outdoor	cETLus
Weight (lbs)	Indoor: ta [ambient] max. 25°C
	16,1lbs

