

# lightnet

## Cubic-L3

Recessed mounted luminaire for ceilings, mounting brackets incl - Direct light distribution

Article code: 1CL3AWE-840M-Q450-G






Illustrations may only be similar and serve as an orientation.

Cubic-L3. LED. Recessed mounted luminaire for ceilings with cut-out openings, mounting brackets included. Surface finish Snow White. Direct only light distribution. Color temperature: 4000K (Cool White). Color Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. UGR<=19. Reflector: Satin Gold. Switchable. LxWxH (square). L=17,7". W=17,7". H=3,9". Medium-power current.

2370lm. 19W. 15,9lbs. Binning initial <= MacAdam 3. IP20. Protection class I. cETLus. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Cubic-L3

Recessed mounted luminaire for ceilings,  
mounting brackets incl - Direct light distribution

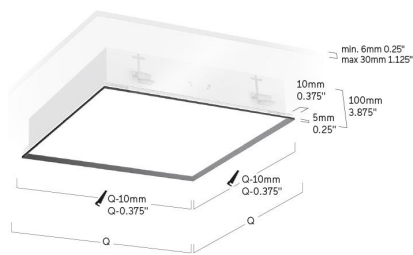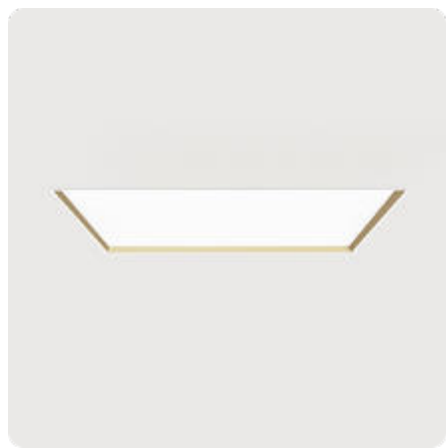

Article code: 1CL3AWE-840M-Q450-G

Customer / Project: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Note: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Productname	Cubic-L3
Lamp	LED
Installation Type	Recessed mounted luminaire for ceilings, mounting brackets incl
Surface finish	Snow White
Light characteristics	Direct light distribution
Color temperature	4000K
Color Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
UGR	UGR<=19
Reflector Color Inside	Reflector: Satin Gold
Control	Switchable
Length L/Diameter D (in)	L=17,7"
Width W (in)	W=17,7"
Height H (in)	H=3,9"
Current/Power	Medium-Power
Luminous Flux	2370lm
Power consumption	19W
Voltage	120-277V
Degree of protection	IP20
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus
Weight (lbs)	15,9lbs

IP20

-120-277V

50-60 Hz

IK 02

RG0

≤3 MACADAM

L85/50000h

CE