

## Cubic-A9

Surface mounted luminaire - Direct light distribution

Article code: 1CA9OED-840H-Q300



Illustrations may only be similar and serve as an orientation.




Cubic-A9. LED. Surface-mounted luminaire for walls or ceilings with overall height of 1.375" profile. Surface finish Silver Anodised. Direct only light distribution. Color temperature: 4000K (Cool White). Color Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Single dimmed 0-10V. LxWxH (square). L=11,8". W=11,8". H=1,4". High-power current. 1650lm. 16W.

5,7lbs. Binning initial  $\leq$  MacAdam 3. IP20. Protection class I. cETLus pending. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

## Cubic-A9

Surface mounted luminaire - Direct light distribution

Article code: 1CA9OED-840H-Q300

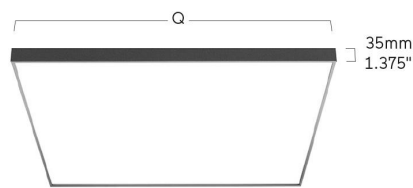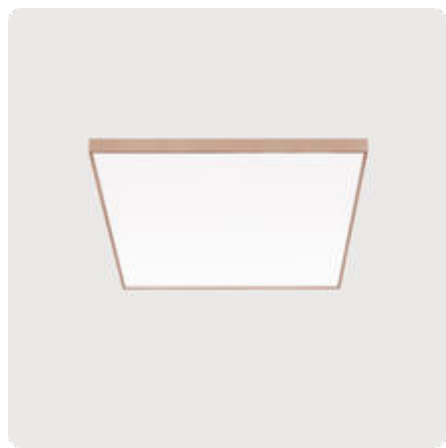

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

|                             |                                |
|-----------------------------|--------------------------------|
| Productname                 | Cubic-A9                       |
| Lamp                        | LED                            |
| Installation Type           | Surface mounted luminaire      |
| Surface finish              | Silver Anodised                |
| Light characteristics       | Direct light distribution      |
| Color temperature           | 4000K                          |
| Color Rendering Index (CRI) | CRI>80                         |
| Optical system              | Opal diffuser                  |
| Control                     | Dimmable (0-10V)               |
| Length L/Diameter D (in)    | L=11,8"                        |
| Width W (in)                | W=11,8"                        |
| Height H (in)               | H=1,4"                         |
| Current/Power               | High-Power                     |
| Luminous Flux               | 1650lm                         |
| Power consumption           | 16W                            |
| Voltage                     | 120-277V                       |
| Degree of protection        | IP20                           |
| Indoor/Outdoor              | Indoor: ta [ambient] max. 25°C |
| LED lifetime                | L85/50,000h (tq 25°C)          |
| Certification               | cETLus pending                 |
| Weight (lbs)                | 5,7lbs                         |

