

Cubic-A9

Surface mounted luminaire - Direct light distribution

Article code: 1CA9AWE-830M-Q300



Illustrations may only be similar and serve as an orientation.



Cubic-A9. LED. Surface-mounted luminaire for walls or ceilings with overall height of 1.375" profile. Surface finish Snow White. Direct only light distribution. Color temperature: @^ÿ\qxó

initial <= MacAdam 3. IP20. Protection class I. cETLus pending. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

lightnet

Cubic-A9

Surface mounted luminaire - Direct light distribution

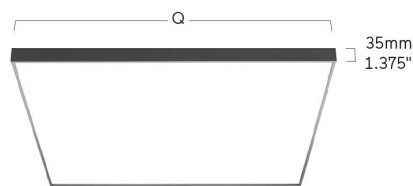

Article code: 1CA9AWE-830M-Q300

Customer / Project: _____

Note: _____

½-WoÄ–3000K (Warm White). Color Rendering Index (CRI): >80. Microprismatic screen for reduced luminance in office areas. UGR<=19. Switchable. LxWxH (square). L= 11,8". W=11,8". H=1,4". Medium-power current. 1131lm. 11W. 5,7lbs. Binning

IP20

-120-277V

50-60 Hz

IK 02

RG0

≤3 MACADAM




L85/50000h

CE

Cubic-A9

Surface mounted luminaire - Direct light distribution

Article code: 1CA9AWE-830M-Q300

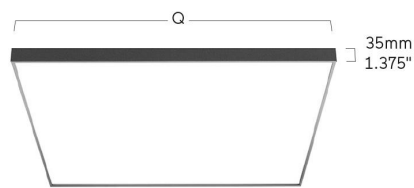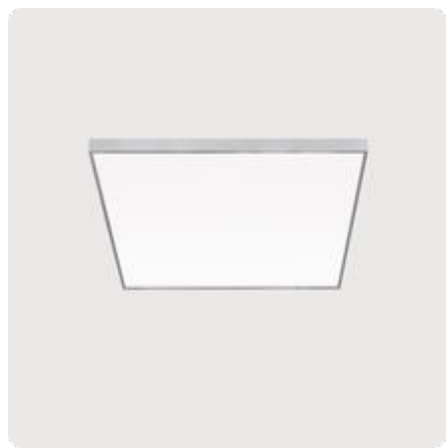

Customer / Project: _____

Note: _____

Productname	Cubic-A9
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Snow White
Light characteristics	Direct light distribution
Color temperature	3000K
Color Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
UGR	UGR<=19
Control	Switchable
Length L/Diameter D (in)	L=11,8"
Width W (in)	W=11,8"
Height H (in)	H=1,4"
Current/Power	Medium-Power
Luminous Flux	1131lm
Power consumption	11W
Voltage	120-277V
Degree of protection	IP20
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus pending
Weight (lbs)	5,7lbs

