

# lightnet

## Cubic-A9

Surface mounted luminaire - Direct light distribution

Article code: 1CA9OWD-830H-Q300



Illustrations may only be similar and serve as an orientation.



Cubic-A9. LED. Surface-mounted luminaire for walls or ceilings with overall height of 1.375" profile. Surface finish Snow White. Direct only light distribution. Color temperature: 3000K (Warm White). Color Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and uniform illumination. Single dimmed 0-10V. LxWxH (square). L=11,8". W=11,8". H=1,4". High-power current. 1543lm. 16W. 5,7lbs.

Binning initial <= MacAdam 3. IP20. Protection class I. cETLus pending. IK02. 120-277V. 50-60 Hz. RG0 (EN62471). A minimum LED lifetime of 50,000h with 85% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements. 5 years warranty. Manufacturer: Lightnet USA Inc

Cubic-A9

Surface mounted luminaire - Direct light distribution

Article code: 1CA9OWD-830H-Q300

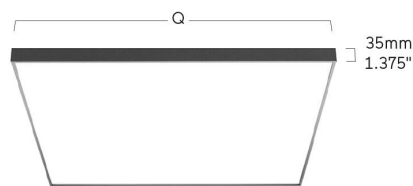

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Cubic-A9
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Snow White
Light characteristics	Direct light distribution
Color temperature	3000K
Color Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Dimmable (0-10V)
Length L/Diameter D (in)	L=11,8"
Width W (in)	W=11,8"
Height H (in)	H=1,4"
Current/Power	High-Power
Luminous Flux	1543lm
Power consumption	16W
Voltage	120-277V
Degree of protection	IP20
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
LED lifetime	L85/50,000h (tq 25°C)
Certification	cETLus pending
Weight (lbs)	5,7lbs

IP20

-120-277V

50-60 Hz

IK 02

RG0

≤3 MACADAM

L85/50000h

CE