


Caleo-M2

Recessed mounted luminaire (trimless) for ceilings,
mounting brackets incl - Direct light distribution

Article code: AM2AWE-830M-Q612



Illustrations may only be similar and serve as an orientation.

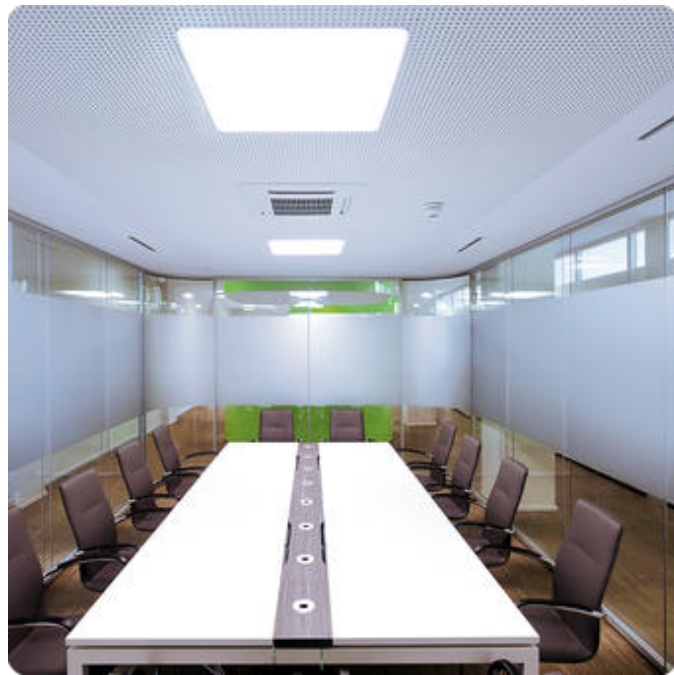

Caleo-M2. LED. Recessed mounted luminaire in soft-edge design (trimless) for mounting in plasterboard ceilings, mounting brackets incl. Luminaire body with increased stability for installation. Surface finish Snow White. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<=19. Switchable. LxWxH (square). L=

612mm. W=612mm. H=100mm. Medium-power current. 4282lm. 40W. 7kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.



Caleo-M2

Recessed mounted luminaire (trimless) for ceilings, mounting brackets incl - Direct light

Article code: AM2AWE-830M-Q612

Customer / Project: _____

Note: _____

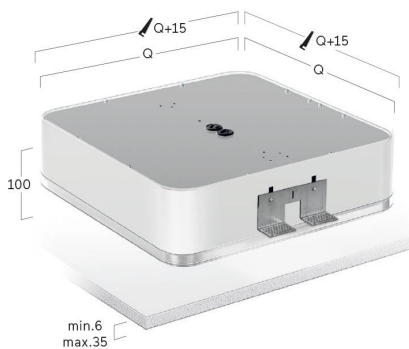

Productname	Caleo-M2
Lamp	LED
Installation Type	Recessed mounted luminaire (trimless) for ceilings, mounting brackets incl
Surface finish	Snow White
Light characteristics	Direct light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Switchable
Length L/Diameter D (mm)	L=612mm
Width W (mm)	W=612mm
Height H (mm)	H=100mm
Current/Power	Medium-Power
Luminous Flux	4282lm
Power consumption	40W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L85B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	7kg

