

Cubic-M4

Recessed mounted luminaire for ceilings, mounting brackets incl - Direct light distribution

Article code: CM4AEE-830H-Q621



Illustrations may only be similar and serve as an orientation.



Cubic-M4. LED. Recessed mounted luminaire with surrounding frame for installation in ceilings with cut-out openings. Mounting brackets included. Luminaire body with increased stability for installation. Surface finish Silver Anodised. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. Switchable. LxWxH (square). L=

621mm. W=621mm. H=100mm. High-power current. 6480lm. 58W. 8,2kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.



Cubic-M4

Recessed mounted luminaire for ceilings,
mounting brackets incl - Direct light distribution

Article code: CM4AEE-830H-Q621

Customer / Project: _____

Note: _____

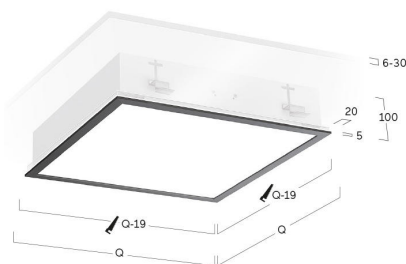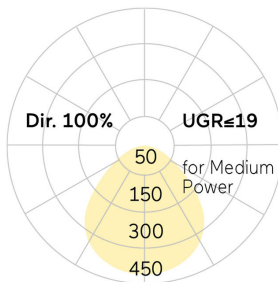

Productname	Cubic-M4
Lamp	LED
Installation Type	Recessed mounted luminaire for ceilings, mounting brackets incl
Surface finish	Silver Anodised
Light characteristics	Direct light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Switchable
Length L/Diameter D (mm)	L=621mm
Width W (mm)	W=621mm
Height H (mm)	H=100mm
Current/Power	High-Power
Luminous Flux	6480lm
Power consumption	58W
Degree of protection	IP20
LED lifetime	L80B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	8,2kg

