

Cubic-M4

Recessed mounted luminaire for ceilings, mounting brackets incl - Direct light distribution

Article code: CM4AEE-830M-Q621



Illustrations may only be similar and serve as an orientation.



Cubic-M4. LED. Recessed mounted luminaire with surrounding frame for installation in ceilings with cut-out openings. Mounting brackets included. Luminaire body with increased stability for installation. Surface finish Silver Anodised. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR≤19. Switchable. LxWxH (square). L=621mm. W=

621mm. H=100mm. Medium-power current. 4413lm. 38W. 8,2kg. Binning initial ≤ MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.



Cubic-M4

Recessed mounted luminaire for ceilings,
mounting brackets incl - Direct light distribution

Article code: CM4AEE-830M-Q621

Customer / Project: _____

Note: _____

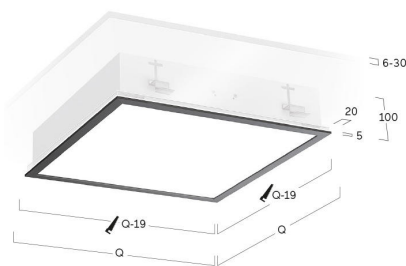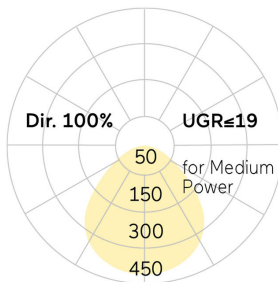

| | |
|------------------------------|---|
| Productname | Cubic-M4 |
| Lamp | LED |
| Installation Type | Recessed mounted luminaire for ceilings, mounting brackets incl |
| Surface finish | Silver Anodised |
| Light characteristics | Direct light distribution |
| Colour temperature | 3000K |
| Colour Rendering Index (CRI) | CRI>80 |
| Optical system | Microprismatic screen |
| Control | Switchable |
| Length L/Diameter D (mm) | L=621mm |
| Width W (mm) | W=621mm |
| Height H (mm) | H=100mm |
| Current/Power | Medium-Power |
| Luminous Flux | 4413lm |
| Power consumption | 38W |
| Degree of protection | IP20 |
| LED lifetime | L85B10 (tq 25°C) = 50.000h |
| UGR | UGR<=19 |
| Photometric code | 8 30 / 3 3 9 |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 8,2kg |

