

Matric-W4

Wall mounted luminaire - Direct/indirect light distribution

Article code: LW4AEG-830H-L1182



Illustrations may only be similar and serve as an orientation.



Matric-W4. LED. Wall mounted luminaire. Luminaire body made of high-quality aluminum profile. Surface finish Silver Anodised. Direct/indirect light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. Separately switchable. LxWxH (rectangular). L=1182mm. W=55mm. H=125mm. High-

power current. 5741lm. 55W. 5,5kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Matric-W4

Wall mounted luminaire - Direct/indirect light distribution

Article code: LW4AEG-830H-L1182

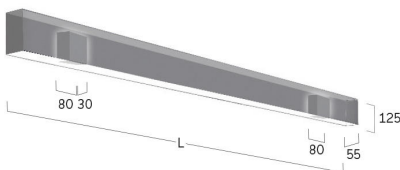

Customer / Project: _____

Note: _____

Productname	Matric-W4
Lamp	LED
Installation Type	Wall mounted luminaire
Surface finish	Silver Anodised
Light characteristics	Direct/indirect light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Separately switchable
Length L/Diameter D (mm)	L=1182mm
Width W (mm)	W=55mm
Height H (mm)	H=125mm
Current/Power	High-Power
Luminous Flux	5741lm
Power consumption	55W
Degree of protection	IP20
LED lifetime	L80B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	5,5kg

