

Ringo Star-A1

Surface mounted luminaire - Direct light distribution

Article code: RA1ASE-827M-D3500



Illustrations may only be similar and serve as an orientation.





Ringo Star-A1. LED. Surface mounted luminaire for walls or ceilings. Luminaire body made of aluminium profile with 100mm track width. Surface finish Radiant Silver. Direct only light distribution. Colour temperature: 2700K (Soft White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. Switchable. DxHxW (round). D=3500mm. W=100mm. H=

85mm. Medium-power current. 30107lm. 281W. 41kg. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Ringo Star-A1

Surface mounted luminaire - Direct light distribution

Article code: RA1ASE-827M-D3500

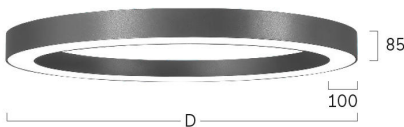

Customer / Project: _____

Note: _____

Productname	Ringo Star-A1
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Radiant Silver
Light characteristics	Direct light distribution
Colour temperature	2700K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Switchable
Length L/Diameter D (mm)	D=3500mm
Width W (mm)	W=100mm
Height H (mm)	H=85mm
Current/Power	Medium-Power
Luminous Flux	30107lm
Power consumption	281W
Degree of protection	IP20
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 27 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	41kg

