
## lightnet

## Basic-Z3

Surface mounted luminaire - Direct light distribution



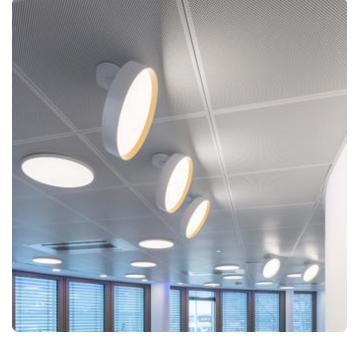

Article code: BZ3AWE-827M-D300-W

Illustrations may only be similar and serve as an orientation.

Basic-Z3. LED. Wall or ceiling mounted luminaire. Luminaire can be rotated and tilted via high-quality joint system, 345° rotation and 90° tilt. Luminaire body made of aluminium profile. 20mm setback lens optic set in a decorative ring. Surface finish Snow White. Direct only light distribution. Colour temperature: 2700K (Soft White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR<= 19. Reflector: Snow White. Switchable. DxH


(round). D=300mm. H=58mm. Medium-power current. 776lm. 8W. 3,2kg. Binning initial <= MacAdam 3. IP40. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

## lightnet

## Basic-Z3

Surface mounted luminaire - Direct light distribution







Article code: BZ3AWE-827M-D300-W

Customer	/ Project:	<b>:</b>		
Note:				

Productname Basic-Z3 Lamp LED

Installation Type Surface mounted luminaire

Surface finish Snow White

Colour temperature 2700K Colour Rendering Index (CRI) CRI>80

Optical system Microprismatic screen
Reflector Colour Inside Reflector: Snow White

Control Switchable
Length L/Diameter D (mm) D=300mm

Height H (mm) H=58mm
Current/Power Medium-Power

Luminous Flux776lmPower consumption8WDegree of protectionIP40

LED lifetime L85B10 (tq 25°C) = 50.000h

UGR UGR<=19
Photometric code 8 27 / 3 3 9
Photobiological class RG0 (EN62471)

Indoor/Outdoor Indoor: ta [ambient] max. 25°C

Weight (kg) 3,2kg





















