


Ringo Star Cluster-G3

Cluster-Pendant luminaire - Direct light distribution

Article code: RG3OBL-840M-#rings



Illustrations may only be similar and serve as an orientation.


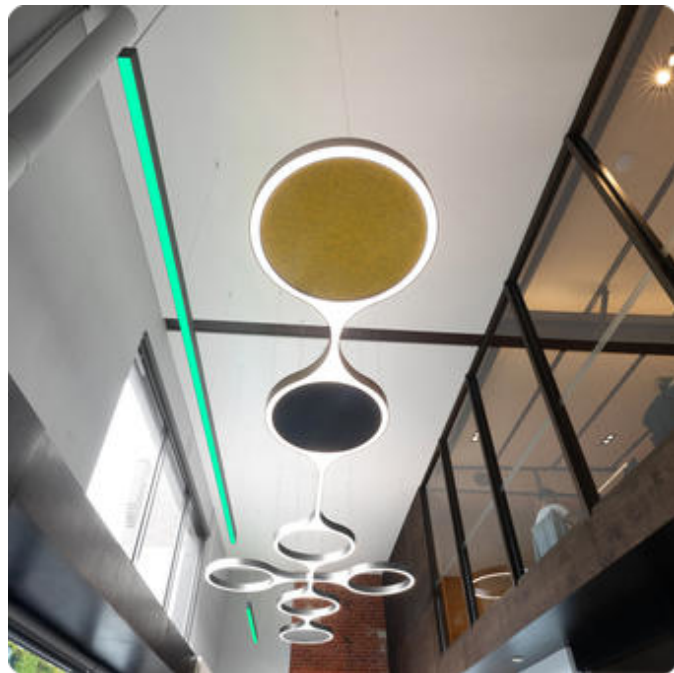


Ringo Star. Ringo Star Cluster-G3. LED. Pendant luminaire (Cluster). Luminaire body made of aluminium profile with 60mm track width. Surface finish Jet Black. Direct only light distribution. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable DALI, according to drawing. D=1000 mm/Ring. W=60mm. H=85mm. Pendant length max 4000mm. Power supply: transparent. Ceiling rose:

Matching luminaire`s surface colour. Medium-power current. Im on request. W on request. Binning initial <= MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Ringo Star Cluster-G3

Cluster-Pendant luminaire - Direct light distribution

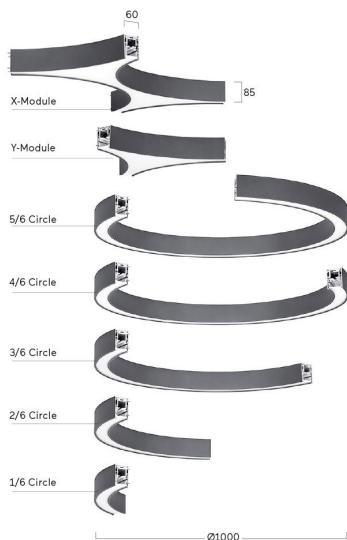

Article code: RG3OBL-840M-#rings

Customer / Project: _____

Note: _____

Productfamily	Ringo Star
Productname	Ringo Star Cluster-G3
Lamp	LED
Installation Type	Cluster-Pendant luminaire
Surface finish	Jet Black
Light characteristics	Direct light distribution
Optical system	Opal diffuser
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Current/Power	Medium-Power
Control	Dimmable (DALI)
Cable Colour	Power supply: transparent
Length L/Diameter D (mm)	D=1000 mm/Ring
Width W (mm)	W=60mm
Height H (mm)	H=85mm
Degree of protection	IP20
Luminous Flux	lm on request
Power consumption	W on request
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Other	according to drawing

IP20

-220-
-240V

50-60
Hz

IK
02

RG0

≤3
MACADAM

LOW
POWER
L90B10
50.000h

MEDIUM
POWER
L85B10
50.000h

CE

UK
CA