

## Basic-L7

Semi-recessed luminaire for ceilings, mounting brackets incl - Direct light distribution

Article code: BL7OSL-830M-D800



Illustrations may only be similar and serve as an orientation.

Basic-L7. LED. Semi-recessed luminaire for mounting in sawn ceiling openings. Luminaire body with 18mm visible overall height and minimalist edge of only 5mm, mounting brackets incl. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct only light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Opal diffuser for enhanced light transmission and perfect uniform illumination. Dimmable DALI. DxH (round). D=800mm. H=



18+32mm. Medium-power current. 4937lm. 40W. 9kg. Binning initial <= MacAdam 3. IP40. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,3%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L85B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

# lightnet

## Basic-L7

Semi-recessed luminaire for ceilings, mounting brackets incl - Direct light distribution

Article code: BL7OSL-830M-D800

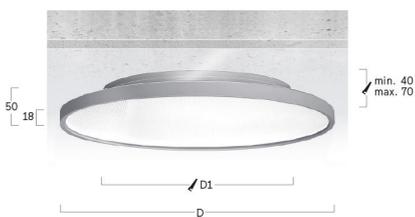

D[mm]	300	400	500	600	800
D1[mm]	230	320	410	490	670

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

Productname	Basic-L7
Lamp	LED
Installation Type	Semi-recessed luminaire for ceilings, mounting brackets incl
Surface finish	Radiant Silver
Light characteristics	Direct light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Opal diffuser
Control	Dimmable (DALI)
Length L/Diameter D (mm)	D=800mm
Height H (mm)	H=18+32mm
Current/Power	Medium-Power
Luminous Flux	4937lm
Power consumption	40W
Degree of protection	IP40
LED lifetime	L85B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	9kg

