

Cubic-A7

Surface mounted luminaire - Direct only omnidirectional light distribution

Article code: CA7FSL-830H-Q300



Illustrations may only be similar and serve as an orientation.

Cubic-A7. LED. Surface mounted luminaire. Luminaire body made of high-quality aluminum profile. Surface finish Radiant Silver. Direct only omnidirectional light distribution. Colour temperature: 3000K (Warm White). Colour Rendering Index (CRI): >80. Ambient diffuser made of frosted methacrylate for enhanced light transmission and perfect uniform illumination. Dimmable DALI. LxWxH (square). L=300mm. W=300mm. H=

60mm. High-power current. 2010lm. 15W. 3kg. Binning initial \leq MacAdam 3. IP20. Protection class I. CE, UKCA marking. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.

Cubic-A7

Surface mounted luminaire - Direct only
omnidirectional light distribution




Article code: CA7FSL-830H-Q300

Customer / Project: _____

Note: _____

Productname	Cubic-A7
Lamp	LED
Installation Type	Surface mounted luminaire
Surface finish	Radiant Silver
Light characteristics	Direct only omnidirectional light distribution
Colour temperature	3000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Ambient diffuser
Control	Dimmable (DALI)
Length L/Diameter D (mm)	L=300mm
Width W (mm)	W=300mm
Height H (mm)	H=60mm
Current/Power	High-Power
Luminous Flux	2010lm
Power consumption	15W
Degree of protection	IP20
LED lifetime	L80B10 (tq 25°C) = 50.000h
Photometric code	8 30 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	3kg

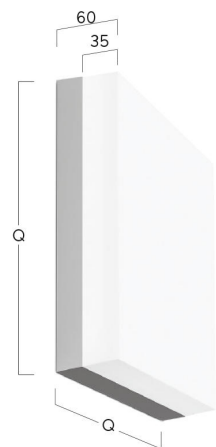

IP20

-220-
-240V

50-60
Hz

IK
02

RG0

≤3
MacAdam

MEDIUM
POWER
L80B10
50000h

HIGH
POWER
L80B10
50000h

CE

UK
CA