

## Cubic-X4

Surface mounted ceiling luminaire - Direct/indirect light distribution

Article code: CX4AWL-840H-L1200



Illustrations may only be similar and serve as an orientation.

Cubic-X4. LED. Surface-mounted luminaire. Luminaire body with distance-spacer. Luminaire body made of high-quality aluminum profile. Surface finish Snow White. Direct light distribution and indirect lighting corona. Colour temperature: 4000K (Cool White). Colour Rendering Index (CRI): >80. Microprismatic screen for uniform illumination and reduced luminance in office areas. UGR≤19. Dimmable DALI. LxWxH (rectangular). L=1200mm. W=200mm. H=25+22mm. High-

power current. 6560lm. 52W. 6,3kg. Binning initial ≤ MacAdam 3. IP20. Protection class I. CE, UKCA marking. Prüfzeichen: ENEC. IK02. 220-240V. 50-60 Hz. RG0 (EN62471). Luminous flux reduction up to 0,4%/1.000 operating hours. Nominal failure rate: 0,2%/1.000 operating hours. L80B10 (tq 25°C) = 50.000h. 5 years warranty. Manufacturer: Lightnet GmbH, ISO 9001:2015 certificated.



## Cubic-X4

Surface mounted ceiling luminaire -  
Direct/indirect light distribution

Article code: CX4AWL-840H-L1200

Customer / Project: \_\_\_\_\_

Note: \_\_\_\_\_

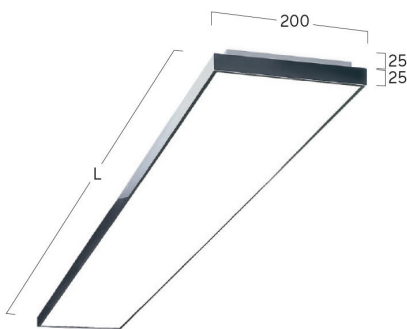

Productname	Cubic-X4
Lamp	LED
Installation Type	Surface mounted ceiling luminaire
Surface finish	Snow White
Light characteristics	Direct/indirect light distribution
Colour temperature	4000K
Colour Rendering Index (CRI)	CRI>80
Optical system	Microprismatic screen
Control	Dimmable (DALI)
Length L/Diameter D (mm)	L=1200mm
Width W (mm)	W=200mm
Height H (mm)	H=25+22mm
Current/Power	High-Power
Luminous Flux	6560lm
Power consumption	52W
Degree of protection	IP20
Certification	Prüfzeichen: ENEC
LED lifetime	L80B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photometric code	8 40 / 3 3 9
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	6,3kg

